

PHYS 1444 – Section 003

Lecture #10

Thursday, Sept. 22, 2011

Dr. Jaehoon Yu

- Chapter 23 Electric Potential
 - E Determined from V
 - Electrostatic Potential
- Chapter 24 Capacitance etc..
 - Capacitors
 - Determination of Capacitance
 - Capacitors in Series or Parallel
 - Electric Energy Storage




Announcements

- First Term Exam
 - 12:30 – 2:00, Thursday, Sept. 29 in SH103
 - Covers CH21.1 - CH24.2, plus Appendices A and B on pages A1 – A7
 - There will be a review session Tuesday, Sept. 27, in the class
 - Bring your own sets of problems to go through in the session
- Colloquium on Wednesday, Oct. 5
 - Triple credit, Mark your calendars!
 - Title: “A Quest for the Origin of the Universe”
 - Guess who the speaker is...



Special Project #3

- Derive the formula for the potential due to a dipole whose magnitude of dipole moment is $p = Q\ell$ at point P which is r away from the $+Q$ of the dipole as shown in the figure on the right. (10 points)
 - You must show your work in a lot more detail than page 14 of this lecture note to obtain any credit.
- Evaluate the moment of a dipole which consists of two charges of $3e$ and $-3e$ and are 1 nm away from each other. (5 points)
- Evaluate the potential due to this dipole at $r=1\mu\text{m}$ away and the angle $\theta=25$ degrees. (5 points)
- Be sure to write down proper units.
- Due is beginning of the class Tuesday, Oct. 4!.

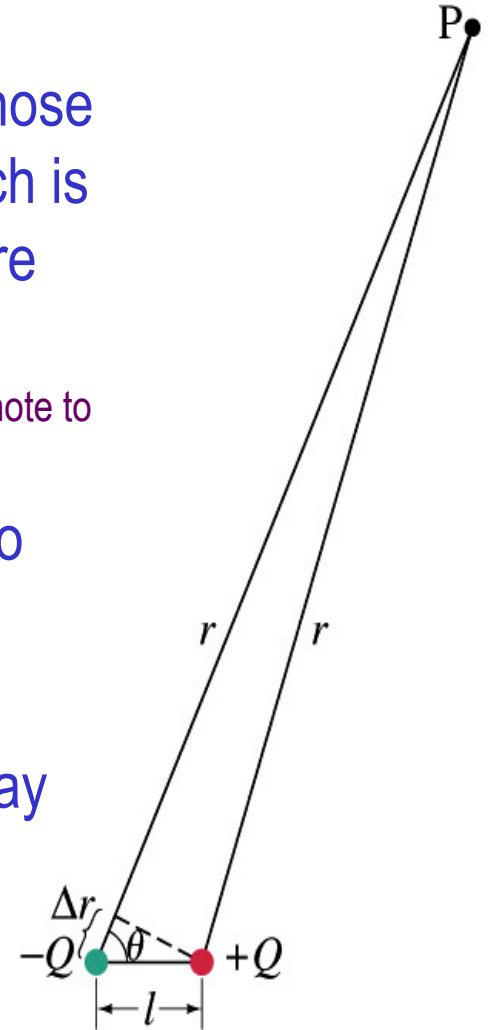

E Determined from V

- Potential difference between two points under the electric field is $V_b - V_a = -\int_a^b \vec{E} \cdot d\vec{l}$

- So in a differential form, we can write

$$dV = -\vec{E} \cdot d\vec{l} = -E_l dl$$

– What are dV and E_l ?

- dV is the infinitesimal potential difference between two points separated by the distance $d\ell$
- E_l is the field component along the direction of $d\ell$
- Thus we can write the field component E_l as

$$E_l = -\frac{dV}{dl}$$

**Physical
Meaning?**

The component of the electric field in any direction is equal to the negative rate of change of the electric potential as a function of distance in that direction.!!



E Determined from V

- The quantity $dV/d\ell$ is called the **gradient of V** in a particular direction
 - If no direction is specified, the term gradient refers to the direction on which V changes most rapidly and this would be the direction of the field vector **E** at that point.
 - So if **E** and $d\ell$ are parallel to each other, $E = -\frac{dV}{d\ell}$
- If E is written as a function of x, y and z, ℓ refers to x, y and z

$$E_x = -\frac{\partial V}{\partial x} \quad E_y = -\frac{\partial V}{\partial y} \quad E_z = -\frac{\partial V}{\partial z}$$
- $\frac{\partial V}{\partial x}$ is the “partial derivative” of V with respect to x, with y and z held constant
- In vector form, $\vec{E} = -\text{grad}V = -\vec{\nabla}V = -\left(\vec{i}\frac{\partial}{\partial x} + \vec{j}\frac{\partial}{\partial y} + \vec{k}\frac{\partial}{\partial z}\right)V$

$\vec{\nabla} = -\left(\vec{i}\frac{\partial}{\partial x} + \vec{j}\frac{\partial}{\partial y} + \vec{k}\frac{\partial}{\partial z}\right)$ is called the **del** or the **gradient operator** and is a **vector operator**.

Electrostatic Potential Energy

- Consider a case in which a point charge q is moved between points a and b where the electrostatic potential due to other charges in the system is V_a and V_b
- The change in electrostatic potential energy of q in the field by other charges is

$$\Delta U = U_b - U_a = q(V_b - V_a) = qV_{ba}$$

- Now what is the electrostatic potential energy of a system of charges?
 - Let's choose $V=0$ at $r=\infty$
 - If there are no other charges around, single point charge Q_1 in isolation has no potential energy and is exerted on with no electric force



Electrostatic Potential Energy; Two charges

- If a second point charge Q_2 is brought close to Q_1 at the distance r_{12} , the potential due to Q_1 at the position of Q_2 is

$$V = \frac{Q_1}{4\pi\epsilon_0} \frac{1}{r_{12}}$$

- The potential energy of the two charges relative to $V=0$ at $r=\infty$ is

$$U = Q_2 V = \frac{1}{4\pi\epsilon_0} \frac{Q_1 Q_2}{r_{12}}$$

- This is the work that needs to be done by an external force to bring Q_2 from infinity to a distance r_{12} from Q_1 .
- It is also a negative of the work needed to separate them to infinity.



Electrostatic Potential Energy; Three Charges

- So what do we do for three charges?
- Work is needed to bring all three charges together
 - Work needed to bring Q_1 to a certain location without the presence of any charge is 0.
 - Work needed to bring Q_2 to a distance to Q_1 is $U_{12} = \frac{1}{4\pi\epsilon_0} \frac{Q_1 Q_2}{r_{12}}$
 - Work need to bring Q_3 to a distance to Q_1 and Q_2 is

$$U_3 = U_{13} + U_{23} = \frac{1}{4\pi\epsilon_0} \frac{Q_1 Q_3}{r_{13}} + \frac{1}{4\pi\epsilon_0} \frac{Q_2 Q_3}{r_{23}}$$

- So the total electrostatic potential of the three charge system is
$$U = U_{12} + U_{13} + U_{23} = \frac{1}{4\pi\epsilon_0} \left(\frac{Q_1 Q_2}{r_{12}} + \frac{Q_1 Q_3}{r_{13}} + \frac{Q_2 Q_3}{r_{23}} \right) \quad [V = 0 \text{ at } r = \infty]$$
 - What about a four charge system or N charge system?



Electrostatic Potential Energy: electron Volt

- What is the unit of electrostatic potential energy?
 - Joules
- Joules is a very large unit in dealing with electrons, atoms or molecules atomic scale problems
- For convenience a new unit, electron volt (eV), is defined
 - 1 eV is defined as the energy acquired by a particle carrying the charge equal to that of an electron ($q=e$) when it moves across a potential difference of 1V.
 - How many Joules is 1 eV then? $1eV = 1.6 \times 10^{-19} C \cdot 1V = 1.6 \times 10^{-19} J$
- eV however is **NOT a standard SI unit**. You must convert the energy to Joules for computations.
- What is the speed of an electron with kinetic energy 5000eV?





Capacitors (or Condensers)

- What is a capacitor?
 - A device that can store electric charge
 - But does not let them flow through
- What does it consist of?
 - Usually consists of two conducting objects (plates or sheets) placed near each other without touching
 - Why can't they touch each other?
 - The charge will neutralize...
- Can you give some examples?
 - Camera flash, UPS, Surge protectors, binary circuits, memory, etc...
- How is a capacitor different than a battery?
 - Battery provides potential difference by storing energy (usually chemical energy) while the capacitor stores charges but very little energy.



Capacitors

- A simple capacitor consists of a pair of parallel plates of area $\mathcal{A}$ separated by a distance d .
 - A cylindrical capacitors are essentially parallel plates wrapped around as a cylinder.

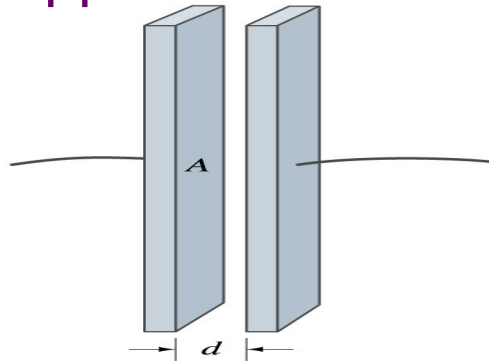




- How would you draw symbols for a capacitor and a battery?

- Capacitor $-||-$
- Battery $(+) -|i- (-)$

Thursday, Sept. 22, 2011




VS 1444-00



Capacitors

- What do you think will happen if a battery is connected (or the voltage is applied) to a capacitor?
 - The capacitor gets charged quickly, one plate positive and other negative in equal amount.
- Each battery terminal, the wires and the plates are conductors. What does this mean?
 - All conductors are at the same potential. And?
 - So the full battery voltage is applied across the capacitor plates.
- So for a given capacitor, the amount of charge stored on each capacitor plate is proportional to the potential difference V_{ba} between the plates. How would you write this formula?



(b)

$$Q = CV_{ba}$$

C is a property of a capacitor so does not depend on Q or V.

- C is a proportionality constant, called capacitance of the device.
- What is the unit? **C/V** or **Farad (F)** Normally use **μF or pF .**

Determination of Capacitance


- C can be determined analytically for capacitors w/ simple geometry and air in between.

- Let's consider a parallel plate capacitor.

- Plates have area A each and separated by d.

- d is smaller than the length, and so E is uniform.

- E for parallel plates is $E = \sigma / \epsilon_0$, σ is the surface charge density.

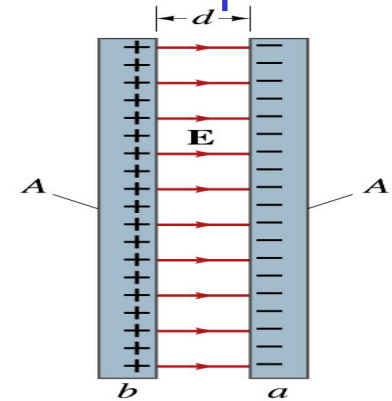

- E and V are related $V_{ba} = -\int_a^b \vec{E} \cdot d\vec{l}$

- Since we take the integral from lower potential (a) higher potential (b) along the field line, we obtain

- $$V_{ba} = V_b - V_a = -\int_a^b E dl \cos 180^\circ = +\int_a^b E dl = \int_a^b \frac{\sigma}{\epsilon_0} dl = \int_a^b \frac{Q}{\epsilon_0 A} dl = \frac{Q}{\epsilon_0 A} \int_a^b dl = \frac{Q}{\epsilon_0 A} (b - a) = \frac{Qd}{\epsilon_0 A}$$

- So from the formula:

- What do you notice?

$$C = \frac{Q}{V_{ba}} = \frac{Q}{Qd/\epsilon_0 A} = \frac{\epsilon_0 A}{d}$$

C only depends on the area and the distance of the plates and the permittivity of the medium between them.

Example 24 – 1

Capacitor calculations: (a) Calculate the capacitance of a capacitor whose plates are 20cmx3.0cm and are separated by a 1.0mm air gap. (b) What is the charge on each plate if the capacitor is connected to a 12-V battery? (c) What is the electric field between the plates? (d) Estimate the area of the plates needed to achieve a capacitance of 1F, given the same air gap.

(a) Using the formula for a parallel plate capacitor, we obtain

$$C = \frac{\epsilon_0 A}{d} =$$
$$= \left(8.85 \times 10^{-12} \text{ C}^2 / \text{N} \cdot \text{m}^2 \right) \frac{0.2 \times 0.03 \text{ m}^2}{1 \times 10^{-3} \text{ m}} = 53 \times 10^{-12} \text{ C}^2 / \text{N} \cdot \text{m} = 53 \text{ pF}$$

(b) From $Q=CV$, the charge on each plate is

$$Q = CV = \left(53 \times 10^{-12} \text{ C}^2 / \text{N} \cdot \text{m} \right) (12 \text{ V}) = 6.4 \times 10^{-10} \text{ C} = 640 \text{ pC}$$



Example 24 – 1

(C) Using the formula for the electric field in two parallel plates

$$E = \frac{\sigma}{\epsilon_0} = \frac{Q}{A\epsilon_0} = \frac{6.4 \times 10^{-10} \text{ C}}{6.0 \times 10^{-3} \text{ m}^2 \times 8.85 \times 10^{-12} \text{ C}^2/\text{N} \cdot \text{m}^2} = 1.2 \times 10^4 \text{ N/C} = 1.2 \times 10^4 \text{ V/m}$$

Or, since $V = Ed$ we can obtain $E = \frac{V}{d} = \frac{12\text{V}}{1.0 \times 10^{-3} \text{ m}} = 1.2 \times 10^4 \text{ V/m}$

(d) Solving the capacitance formula for A, we obtain

$$C = \frac{\epsilon_0 A}{d}$$

Solve for A


$$A = \frac{Cd}{\epsilon_0} = \frac{1\text{F} \cdot 1 \times 10^{-3} \text{ m}}{(9 \times 10^{-12} \text{ C}^2/\text{N} \cdot \text{m}^2)} \approx 10^8 \text{ m}^2 \approx 100 \text{ km}^2$$

About 40% the area of Arlington (256km²).



Example 24 – 3

Spherical capacitor: A spherical capacitor consists of two thin concentric spherical conducting shells, of radius r_a and r_b , as in the figure. The inner shell carries a uniformly distributed charge Q on its surface and the outer shell and equal but opposite charge $-Q$.

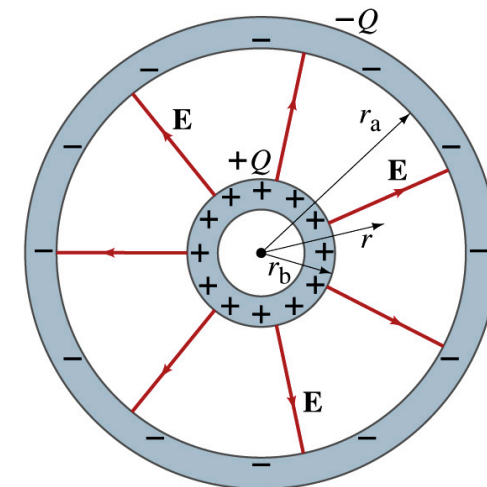

$$E = \frac{Q}{4\pi\epsilon_0 r^2}$$

Using Gauss' law, the electric field outside a uniformly charged conducting sphere is

So the potential difference between a and b is

$$\begin{aligned} V_{ba} &= -\int_a^b \vec{E} \cdot d\vec{l} = \\ &= -\int_a^b E \cdot dr = -\int_a^b \frac{Q}{4\pi\epsilon_0 r^2} dr = -\frac{Q}{4\pi\epsilon_0} \int_a^b \frac{dr}{r^2} = \frac{Q}{4\pi\epsilon_0} \left(\frac{1}{r} \right)_{r_a}^{r_b} = \frac{Q}{4\pi\epsilon_0} \left(\frac{1}{r_b} - \frac{1}{r_a} \right) = \frac{Q}{4\pi\epsilon_0} \left(\frac{r_a - r_b}{r_b r_a} \right) \end{aligned}$$

Thus capacitance is

$$C = \frac{Q}{V} = \frac{Q}{\frac{Q}{4\pi\epsilon_0} \left(\frac{r_a - r_b}{r_b r_a} \right)} = \frac{4\pi\epsilon_0 r_b r_a}{r_a - r_b}$$

Capacitor Cont'd

- A single isolated conductor can be said to have a capacitance, C .
- C can still be defined as the ratio of the charge to absolute potential V on the conductor.
 - So $Q=CV$.
- The potential of a single conducting sphere of radius r_b can be obtained as

$$V = \frac{Q}{4\pi\epsilon_0} \left(\frac{1}{r_b} - \frac{1}{r_a} \right) = \frac{Q}{4\pi\epsilon_0 r_b} \quad \text{where } r_a \rightarrow \infty$$

- So its capacitance is

$$C = \frac{Q}{V} = 4\pi\epsilon_0 r_b$$

