

PHYS 1441 – Section 002

Lecture #22

Wednesday, Apr. 16, 2008

Dr. Jaehoon Yu

- Moment of Inertia
- Work, Power and Energy in Rotation
- Rotational Kinetic Energy
- Angular Momentum and Its Conservation
- Similarity of Linear and Rotational Quantities
- Simple Harmonic Motion



Announcements

- 3rd term exam
 - 1 – 2:20pm, Next Monday, Apr. 21
 - Covers: Ch. 6.7 – 9.6
 - Practice problems can be downloaded from my home page:
 - <http://www-hep.uta.edu/~yu/ch06-practice.pdf>
 - <http://www-hep.uta.edu/~yu/ch07-practice.pdf>
 - <http://www-hep.uta.edu/~yu/ch08-practice.pdf>
 - <http://www-hep.uta.edu/~yu/ch09-practice.pdf>
 - This is the final term exam in the semester
 - The worst of the three term exams will be dropped from the final grading
- Final Exam
 - Comprehensive exam: CH1.1 – what we can cover on Apr. 23
 - Jason will conduct review on Apr. 28 and Apr. 30 in preparation for this exam
 - Time and date: 11am – 12:30 pm, Monday, May 5
 - Place: SH103
- Colloquium today at 4pm in SH101
 - Dr. Nail Fazleev of UTA Physics

Wednesday, Apr. 16, 2008



PHYS 1441-002, Spring 2008
Dr. Jaehoon Yu

Physics Department
The University of Texas at Arlington
COLLOQUIUM

**Proximity Effects in Superconductor-
Ferromagnet Nanostructures**

Dr. Nail Fazleev
University of Texas at Arlington

**4:00 pm Wednesday, April 16, 2008
Room 101 SH**

Abstract

It has been known for quite a long time that superconductivity and ferromagnetism are two antagonistic orderings and that they can hardly coexist in the same compound. However their mutual interaction may be studied when they are spatially separated, as is realized in superconductor-ferromagnet (S/F) nanostructures. Indeed, in such systems, superconductivity and ferromagnetism can influence each other through the so-called proximity effect. This proximity effect leads to several interesting phenomena, such as nonmonotonic dependence of superconducting transition temperature T_c on thickness d_f of a ferromagnetic layer, the realization of the so-called π junction in S/F/S trilayers, and the local quasiparticle density of states oscillation in S/F structures. In my talk I will discuss within the developed theory of the proximity effect properties of multilayered S/F nanostructures and new physical phenomena predicted in these structures, including decoupled superconductivity and hierarchy of critical temperature in 4- and 5-layered SF nanostructures, the effect of the Umklapp processes and oscillations of the Cooper pairs flux through the S/F interface on non-monotonic behavior of the critical temperature T_c in 3-layered structures, the inverse proximity effect in F/S bylayers and superlattices. Finally, I will discuss a conceptual scheme of a control device with superconducting and magnetic recording channels based on a F/S nanostructure that can be controlled separately using a weak magnetic field.

Refreshments will be served in the Physics Library at 3:30 pm

Moment of Inertia

Rotational Inertia:

Measure of resistance of an object to changes in its rotational motion.
Equivalent to mass in linear motion.

For a group
of objects

$$I \equiv \sum_i m_i r_i^2$$

For a rigid
body

$$I \equiv \int r^2 dm$$

What are the dimension and
unit of Moment of Inertia?

$$[ML^2] \quad kg \cdot m^2$$

Determining Moment of Inertia is extremely important for computing equilibrium of a rigid body, such as a building.

Dependent on the axis of rotation!!!

Ex. 9 The Moment of Inertia Depends on Where the Axis Is.

Two particles each have mass and are fixed at the ends of a thin rigid rod. The length of the rod is L . Find the moment of inertia when this object rotates relative to an axis that is perpendicular to the rod at (a) one end and (b) the center.

$$(a) \quad I = \sum (mr^2) = m_1 r_1^2 + m_2 r_2^2$$


$$m_1 = m_2 = m \quad r_1 = 0 \quad r_2 = L$$

$$I = m(0)^2 + m(L)^2 = mL^2$$

$$(b) \quad I = \sum (mr^2) = m_1 r_1^2 + m_2 r_2^2$$

$$m_1 = m_2 = m \quad r_1 = L/2 \quad r_2 = L/2$$

$$I = m(L/2)^2 + m(L/2)^2 = \frac{1}{2} mL^2$$

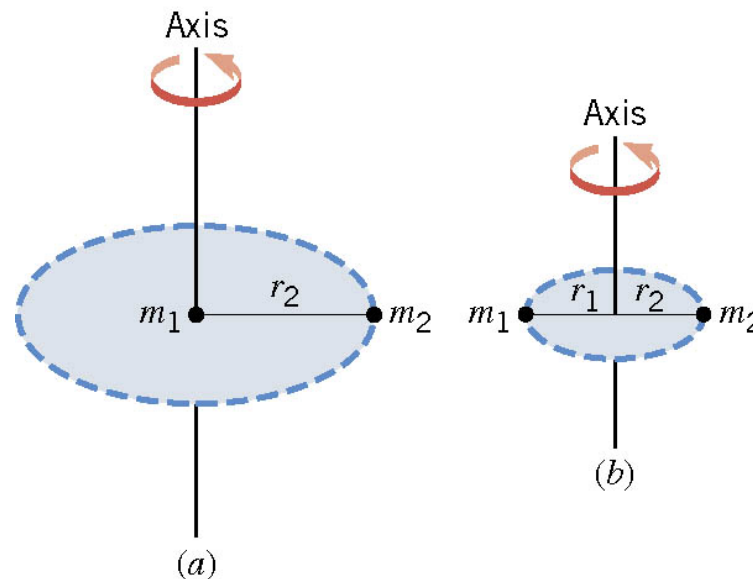


Which case is easier to spin?

Case (b)

Why? Because the moment of inertia is smaller

Example for Moment of Inertia

In a system of four small spheres as shown in the figure, assuming the radii are negligible and the rods connecting the particles are massless, compute the moment of inertia and the rotational kinetic energy when the system rotates about the y-axis at angular speed ω .

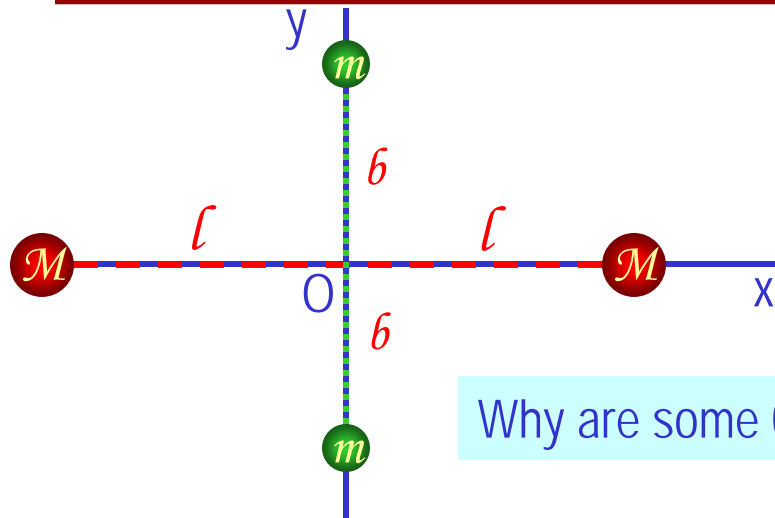

Since the rotation is about y axis, the moment of inertia about y axis, I_y , is

$$I = \sum_i m_i r_i^2 = Ml^2 + Ml^2 + m \cdot 0^2 + m \cdot 0^2 = 2Ml^2$$

Why are some 0s?

This is because the rotation is done about y axis, and the radii of the spheres are negligible.

Thus, the rotational kinetic energy is

$$K_R = \frac{1}{2} I \omega^2 = \frac{1}{2} (2Ml^2) \omega^2 = Ml^2 \omega^2$$

Find the moment of inertia and rotational kinetic energy when the system rotates on the x-y plane about the z-axis that goes through the origin O.

$$I = \sum_i m_i r_i^2 = Ml^2 + Ml^2 + mb^2 + mb^2 = 2(Ml^2 + mb^2) \quad K_R = \frac{1}{2} I \omega^2 = \frac{1}{2} (2Ml^2 + 2mb^2) \omega^2 = (Ml^2 + mb^2) \omega^2$$

Check out Table 9.1 for moment of inertia for various shaped objects

Table 9.1 Moments of Inertia I for Various Rigid Objects of Mass M


Thin-walled hollow cylinder or hoop	$I = MR^2$
Solid cylinder or disk	$I = \frac{1}{2}MR^2$
Thin rod, axis perpendicular to rod and passing through center	$I = \frac{1}{12}ML^2$
Thin rod, axis perpendicular to rod and passing through one end	$I = \frac{1}{3}ML^2$
Solid sphere, axis through center	$I = \frac{2}{5}MR^2$
Solid sphere, axis tangent to surface	$I = \frac{8}{5}MR^2$
Thin-walled spherical shell, axis through center	$I = \frac{2}{3}MR^2$
Thin rectangular sheet, axis parallel to one edge and passing through center of other edge	$I = \frac{1}{12}ML^2$
Thin rectangular sheet, axis along one edge	$I = \frac{1}{3}ML^2$

Wednesday, Apr. 16, 2008



PHYS 1441-002, S
Dr. Jaehoon

Torque & Angular Acceleration



Let's consider a point object with mass m rotating on a circle.

What forces do you see in this motion?

The tangential force F_t and the radial force F_r

The tangential force F_t is $F_t = ma_t = mr\alpha$

The torque due to tangential force F_t is $\tau = F_t r = ma_t r = mr^2 \alpha = I\alpha$

What do you see from the above relationship?

$$\tau = I\alpha$$

What does this mean?

Torque acting on a particle is proportional to the angular acceleration.

What law do you see from this relationship?


Analogous to Newton's 2nd law of motion in rotation.

How about a rigid object?

The external tangential force δF_t is $\delta F_t = \delta m a_t = \delta m r \alpha$

The torque due to tangential force F_t is $\delta \tau = \delta F_t r = (r^2 \delta m) \alpha$

The total torque is $\sum \delta \tau = \alpha \sum r^2 \delta m = I\alpha$

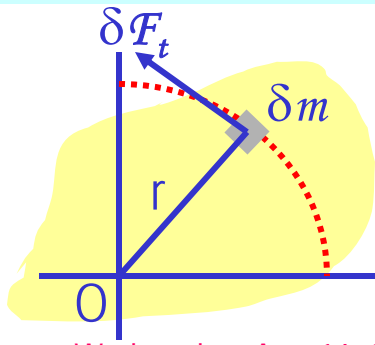

What is the contribution due to radial force and why?

Contribution from radial force is 0, because its line of action passes through the pivoting point, making the moment arm 0.

Wednesday, Apr. 16, 2014




Dr. Jaehoon Yu

200

Ex. 12 Hosting a Crate

The combined moment of inertia of the dual pulley is $50.0 \text{ kg}\cdot\text{m}^2$.

The crate weighs 4420 N . A tension of 2150 N is maintained in the cable attached to the motor. Find the angular acceleration of the dual pulley.

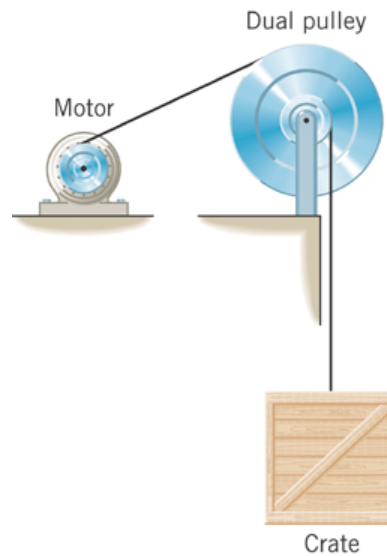

(a)

$$\sum F_y = T_2' - mg = ma_y$$

$$T_2' = mg + ma_y$$

$$\sum \tau = T_1 \ell_1 - T_2' \ell_2 =$$

$$T_1 \ell_1 - (mg + ma_y) \ell_2 = I \alpha$$

since $a_y = \ell_2 \alpha$ \Rightarrow $T_1 \ell_1 - (mg + m \ell_2 \alpha) \ell_2 = I \alpha$


\Rightarrow Solve for α $\alpha = \frac{T_1 \ell_1 - mg \ell_2}{I + m \ell_2^2} = \frac{(2150 \text{ N})(0.600 \text{ m}) - (451 \text{ kg})(9.80 \text{ m/s}^2)(0.200 \text{ m})}{46.0 \text{ kg}\cdot\text{m}^2 + (451 \text{ kg})(0.200 \text{ m})^2} = 6.3 \text{ rad/s}^2$

Wednesday, Apr. 16, 2008



PHYS 1441-002, Spring 2008
Dr. Jaehoon Yu

Work, Power, and Energy in Rotation

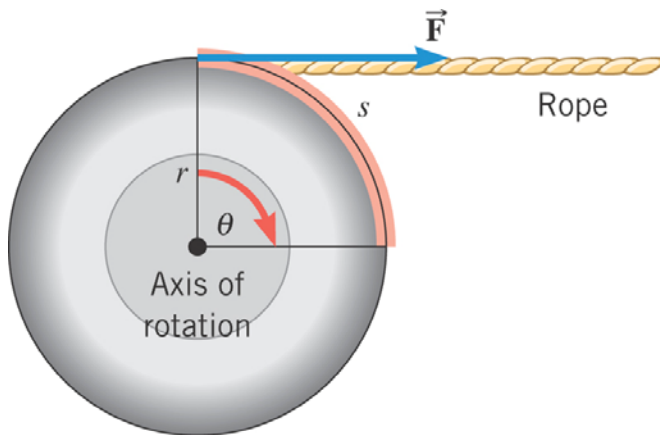

Let's consider the motion of a rigid body with a single external force \mathbf{F} exerting tangentially, moving the object by s .

The rotational work done by the force \mathbf{F} as the object rotates through the distance $s=r\theta$ is

$$W = Fs = Fr\theta$$

Since the magnitude of torque is rF ,

$$W = Fr\theta = \tau\theta$$

What is the unit of the rotational work? J (Joules)


The rate of work, or power, of the constant torque τ becomes

$$P = \frac{\Delta W}{\Delta t} = \tau \left(\frac{\Delta \theta}{\Delta t} \right) = \tau \omega$$

How was the power defined in linear motion?

What is the unit of the rotational power? J/s or W (watts)

Rotational Kinetic Energy

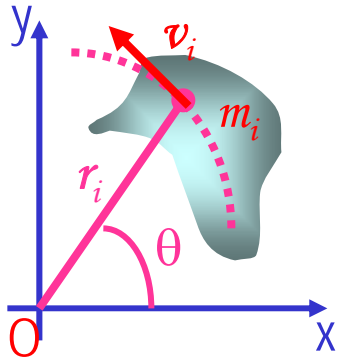

What do you think the kinetic energy of a rigid object that is undergoing a circular motion is?

Kinetic energy of a masslet, m_i , moving at a tangential speed, v_i , is $K_i = \frac{1}{2} m_i v_i^2 = \frac{1}{2} m_i r_i^2 \omega^2$

Since a rigid body is a collection of masslets, the total kinetic energy of the rigid object is

$$KE_R = \sum_i K_i = \frac{1}{2} \sum_i m_i r_i^2 \omega^2 = \frac{1}{2} \left(\sum_i m_i r_i^2 \right) \omega^2$$

Since moment of Inertia, I , is defined as


$$I = \sum_i m_i r_i^2$$

The above expression is simplified as

$$KE_R = \frac{1}{2} I \omega^2 \quad \text{Unit? } J$$

Ex. 13 Rolling Cylinders

A thin-walled hollow cylinder (mass = m_h , radius = r_h) and a solid cylinder (mass = m_s , radius = r_s) start from rest at the top of an incline. Determine which cylinder has the greatest translational speed upon reaching the bottom.

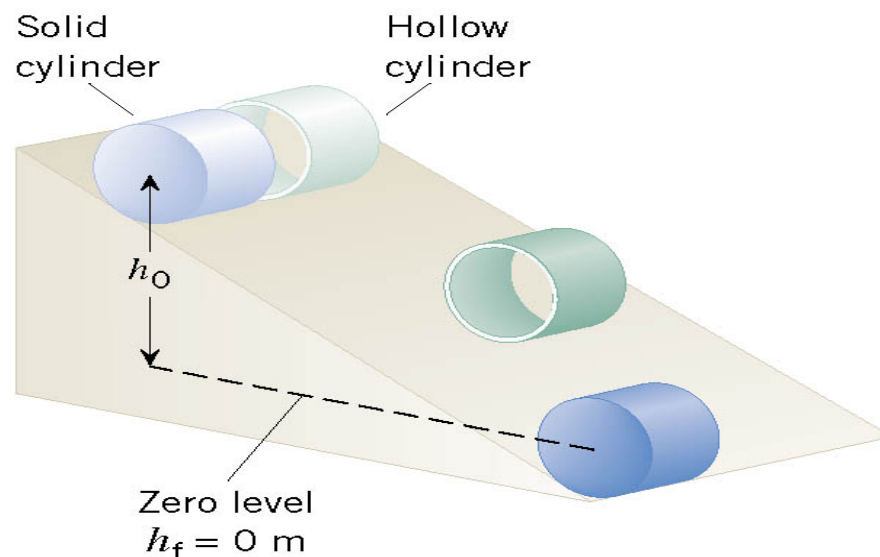

Total Mechanical Energy = KE + KE_R + PE

$$E = \frac{1}{2}mv^2 + \frac{1}{2}I\omega^2 + mgh$$

From Energy Conservation $\frac{1}{2}mv_f^2 + \frac{1}{2}I\omega_f^2 + mgh_f = \frac{1}{2}mv_i^2 + \frac{1}{2}I\omega_i^2 + mgh_0$

$$\frac{1}{2}mv_f^2 + \frac{1}{2}I\omega_f^2 = mgh_i \quad \text{since} \quad \omega_f = \frac{v_f}{r} \quad \Rightarrow \quad \frac{1}{2}mv_f^2 + \frac{1}{2}I\frac{v_f^2}{r^2} = mgh_0$$

Solve for v_f
$$v_f = \sqrt{\frac{2mgh_0}{m + I/r^2}}$$

What does this tell you?

The cylinder with the smaller moment of inertia will have a greater final translational speed.

The final speeds of the cylinders are


$$v_f^h = \sqrt{\frac{2mgh_0}{m + I_h/r^2}} = \sqrt{\frac{2mgh_0}{m + mr_h^2/r_h^2}} = \sqrt{\frac{2mgh_0}{2m}} = \sqrt{gh_0}$$

$$v_f^s = \sqrt{\frac{2mgh_0}{m + I_s/r^2}} = \sqrt{\frac{2mgh_0}{m + \frac{1}{2}mr_h^2/r_h^2}} = \sqrt{\frac{2mgh_0}{\frac{3}{2}m}} = \sqrt{\frac{3}{2}gh_0} = \sqrt{\frac{3}{2}}v_f^h = 1.15v_f^h$$

Wednesday, Apr. 16,

Angular Momentum of a Particle

If you grab onto a pole while running, your body will rotate about the pole, gaining angular momentum. We've used the linear momentum to solve physical problems with linear motions, the angular momentum will do the same for rotational motions.

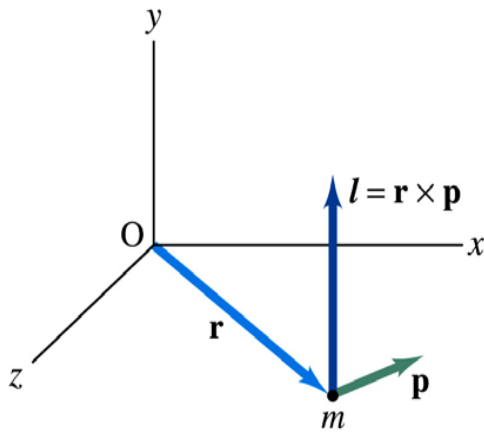

Let's consider a point-like object (particle) with mass m located at the vector location \mathbf{r} and moving with linear velocity \mathbf{v}

The angular momentum \mathcal{L} of this particle relative to the origin O is

$$|\vec{L}| \equiv |\vec{r}| |\vec{p}| \sin \phi$$

What is the unit and dimension of angular momentum? $\text{kg} \cdot \text{m}^2 / \text{s}$ $[ML^2T^{-1}]$

Note that \mathcal{L} depends on origin O. Why? Because \mathbf{r} changes

What else do you learn? The direction of \mathcal{L} is +z

Since \mathbf{p} is $m\mathbf{v}$, the magnitude of \mathcal{L} becomes $L = mvr = mr^2\omega = I\omega$

What do you learn from this?

If the direction of linear velocity points to the origin of rotation, the particle does not have any angular momentum.

If the linear velocity is perpendicular to position vector, the particle moves exactly the same way as a point on a rim.

Conservation of Angular Momentum

Remember under what condition the linear momentum is conserved?

Linear momentum is conserved when the net external force is 0. $\sum \vec{F} = 0 = \frac{\Delta \vec{p}}{\Delta t}$
 $\vec{p} = \text{const}$

By the same token, the angular momentum of a system is constant in both magnitude and direction, if the resultant external torque acting on the system is 0.

$$\sum \vec{\tau}_{ext} = \frac{\Delta \vec{L}}{\Delta t} = 0$$

$$\vec{L} = \text{const}$$

What does this mean?

Angular momentum of the system before and after a certain change is the same.

$$\vec{L}_i = \vec{L}_f = \text{constant}$$

Three important conservation laws for isolated system that does not get affected by external forces

$$K_i + U_i = K_f + U_f$$

$$\vec{p}_i = \vec{p}_f$$

$$\vec{L}_i = \vec{L}_f$$

Mechanical Energy

Linear Momentum

Angular Momentum



Example for Angular Momentum Conservation

A star rotates with a period of 30 days about an axis through its center. After the star undergoes a supernova explosion, the stellar core, which had a radius of $1.0 \times 10^4 \text{ km}$, collapses into a neutron star of radius 3.0 km . Determine the period of rotation of the neutron star.

What is your guess about the answer?

The period will be significantly shorter, because its radius got smaller.

Let's make some assumptions:

1. There is no external torque acting on it
2. The shape remains spherical
3. Its mass remains constant

Using angular momentum conservation

$$L_i = L_f$$

$$I_i \omega_i = I_f \omega_f$$

The angular speed of the star with the period T is

$$\omega = \frac{2\pi}{T}$$

Thus
$$\omega_f = \frac{I_i \omega_i}{I_f} = \frac{mr_i^2}{mr_f^2} \frac{2\pi}{T_i}$$

$$T_f = \frac{2\pi}{\omega_f} = \left(\frac{r_f^2}{r_i^2} \right) T_i = \left(\frac{3.0}{1.0 \times 10^4} \right)^2 \times 30 \text{ days} = 2.7 \times 10^{-6} \text{ days} = 0.23 \text{ s}$$



Ex. 14 A Spinning Skater

An ice skater is spinning with both arms and a leg outstretched. She pulls her arms and leg inward and her spinning motion changes dramatically. Use the principle of conservation of angular momentum to explain how and why her spinning motion changes.




The system of the ice skater does not have any net external torque applied to her. Therefore the angular momentum is conserved for her system. By pulling her arm inward, she reduces the moment of inertia (Σmr^2) and thus in order to keep the angular momentum the same, her angular speed has to increase.

Ex. 15 A Satellite in an Elliptical Orbit

A satellite is placed in an elliptical orbit about the earth. Its point of closest approach is $8.37 \times 10^6 \text{ m}$ from the center of the earth, and its point of greatest distance is $25.1 \times 10^6 \text{ m}$ from the center of the earth. The speed of the satellite at the perigee is 8450 m/s . Find the speed at the apogee.

Angular momentum is $L = I\omega$

From angular momentum conservation $I_A \omega_A = I_P \omega_P$

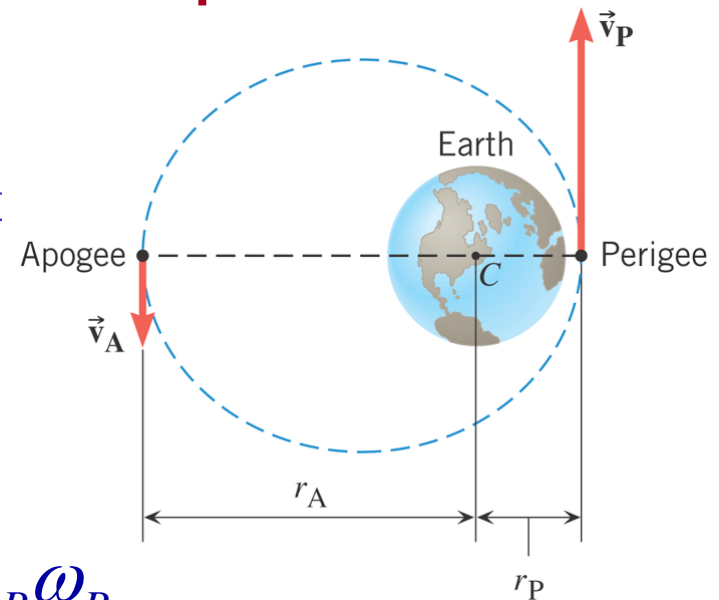

since $I = mr^2$ and $\omega = v/r$ $\Rightarrow \cancel{m}r_A^2 \frac{v_A}{r_A} = \cancel{m}r_P^2 \frac{v_P}{r_P} \Rightarrow r_A v_A = r_P v_P$

$\Rightarrow v_A = \frac{r_P v_P}{r_A} = \frac{(8.37 \times 10^6 \text{ m})(8450 \text{ m/s})}{25.1 \times 10^6 \text{ m}} = 2820 \text{ m/s}$

Similarity Between Linear and Rotational Motions

All physical quantities in linear and rotational motions show striking similarity.

Quantities	Linear	Rotational
Mass	Mass M	Moment of Inertia $I = mr^2$
Length of motion	Distance L	Angle θ (Radian)
Speed	$v = \frac{\Delta r}{\Delta t}$	$\omega = \frac{\Delta \theta}{\Delta t}$
Acceleration	$a = \frac{\Delta v}{\Delta t}$	$\alpha = \frac{\Delta \omega}{\Delta t}$
Force	Force $\vec{F} = m\vec{a}$	Torque $\vec{\tau} = I\vec{\alpha}$
Work	Work $W = \vec{F} \cdot \vec{d}$	Work $W = \tau\theta$
Power	$P = \vec{F} \cdot \vec{v}$	$P = \tau\omega$
Momentum	$\vec{p} = m\vec{v}$	$\vec{L} = I\vec{\omega}$
Kinetic Energy	Kinetic $K = \frac{1}{2}mv^2$	Rotational $K_R = \frac{1}{2}I\omega^2$

