# PHYS 1441 – Section 002 Lecture #16


Monday, March 25, 2013 Dr. Jaehoon Yu

- Gravitational Potential Energy
- Elastic Potential Energy
- Mechanical Energy Conservation
- Power
- Linear Momentum
- Linear Momentum and Impulse



# Announcements

- Midterm grade discussion
  - This Wednesday in my office, CPB342
  - Extremely important!!
  - Time slot determined by the last name
    - A C: 3:30 4pm
    - D J: 4 4:30pm
    - K O: 4:30 5pm
    - P Z: 5 5:30pm



# Special Project #5

- 1. A ball of mass  $\mathcal{M}$  at rest is dropped from the height h above the ground onto a spring on the ground, whose spring constant is k. Neglecting air resistance and assuming that the spring is in its equilibrium, express, in terms of the quantities given in this problem and the gravitational acceleration g, the distance  $\chi$  of which the spring is pressed down when the ball completely loses its energy. (10 points)
- 2. Find the  $\chi$  above if the ball's initial speed is  $v_i$ . (10 points)
- 3. Due for the project is this Wednesday, Apr. 3
- 4. You must show the detail of your OWN work in order to obtain any credit.



### **Example for Potential Energy**

A bowler drops bowling ball of mass 7kg on his toe. Choosing the floor level as y=0, estimate the total work done on the ball by the gravitational force as the ball falls on the toe.

M

Let's assume the top of the toe is 0.03m from the floor and the hand was 0.5m above the floor.

$$U_{i} = mgy_{i} = 7 \times 9.8 \times 0.5 = 34.3J \quad U_{f} = mgy_{f} = 7 \times 9.8 \times 0.03 = 2.06J$$
$$W_{g} = -\Delta U = -(U_{f} - U_{i}) = 32.24J \cong 30J$$

b) Perform the same calculation using the top of the bowler's head as the origin.

What has to change? First we must re-compute the positions of the ball in his hand and on his toe.

Assuming the bowler's height is 1.8m, the ball's original position is –1.3m, and the toe is at –1.77m.

$$U_{i} = mgy_{i} = 7 \times 9.8 \times (-1.3) = -89.2J \quad U_{f} = mgy_{f} = 7 \times 9.8 \times (-1.77) = -121.4J$$
$$W_{g} = -\Delta U = -(U_{f} - U_{i}) = 32.2J \cong 30J$$

Monday, Mar. 25, 2013



# **Elastic Potential Energy**

Potential energy given to an object by a spring or an object with elasticity in the system that consists of an object and the spring.

The force spring exerts on an object when it is distorted from its equilibrium by a distance  $\chi$  is

$$F_s = -kx$$
 Hooke's Law

x = 0

(a)

*The work performed on the object by the spring is* 

The potential energy of this system is

What do you see from the above equations?

The work done on the object by the spring depends only on the initial and final position of the distorted spring.

Where else did you see this trend?

The gravitational potential energy,  $U_{_{\mathcal{A}}}$ 

 $U_s \equiv \frac{1}{2}kx^2$ 

So what does this tell you about the elastic force?

A conservative force!!!

 $W_{s} = \int_{x_{i}}^{x_{f}} (-kx) dx = \left| -\frac{1}{2} kx^{2} \right|_{x_{i}}^{x_{f}} = -\frac{1}{2} kx_{f}^{2} + \frac{1}{2} kx_{i}^{2} = \frac{1}{2} kx_{i}^{2} - \frac{1}{2} kx_{f}^{2}$ 

Monday, Mar. 25, 2013



PHYS 1441-002, Spring 2013 Dr. Jaehoon Yu

#### **Conservative and Non-conservative Forces**

The work done on an object by the gravitational force does not depend on the object's path in the absence of a retardation force.

When directly falls, the work done on the object by the gravitation force is  $W_{g} =$ mgh

> When sliding down the hill of length l, the work is

$$W_{g} = F_{g-incline} \times l = mg \sin \theta \times l$$
$$= mg (l \sin \theta) = mgh$$

How about if we lengthen the incline by a factor of 2, keeping the height the same?? Still the same amount of work ©

TT/

$$W_g = mgh$$


So the work done by the gravitational force on an object is independent of the path of the object's movements. It only depends on the difference of the object's initial and final position in the direction of the force.

Forces like gravitational and elastic forces are called the conservative force

θ

h

Monday, Mar. 25, 2013



Total mechanical energy is conserved!!


$$E_M \equiv KE_i + PE_i = KE_f + PE_f$$



#### **Conservation of Mechanical Energy**

Total mechanical energy is the sum of kinetic and potential energies

$$E \equiv KE + PE$$

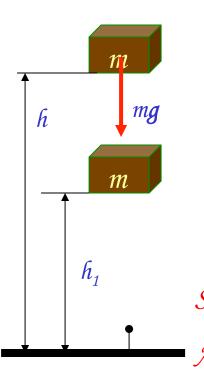


Let's consider a brick of mass m at the height h from the ground

What is the brick's potential energy? PE = mgh

What happens to the energy as the brick falls to the ground?  $\Delta PE = PE_f - PE_i = -Fs$ 

The brick gains speed By how much? v = gtSo what? The brick's kinetic energy increased  $K = \frac{1}{2}mv^2 = \frac{1}{2}mg^2t^2$ 

*And?* The lost potential energy is converted to kinetic energy!!




The total mechanical energy of a system remains constant in any isolated systems of objects that interacts only through conservative forces:  $KE_i + \sum PE_i = KE_f + \sum PE_f$ <u>Principle of mechanical energy conservation</u> PHYS 1441-002, Spring 2013 7

Dr. Jaehoon Yu

Monday, Mar. 25, 2013

### Example

A ball of mass m at rest is dropped from the height h above the ground. a) Neglecting the air resistance, determine the speed of the ball when it is at the height y above the ground.

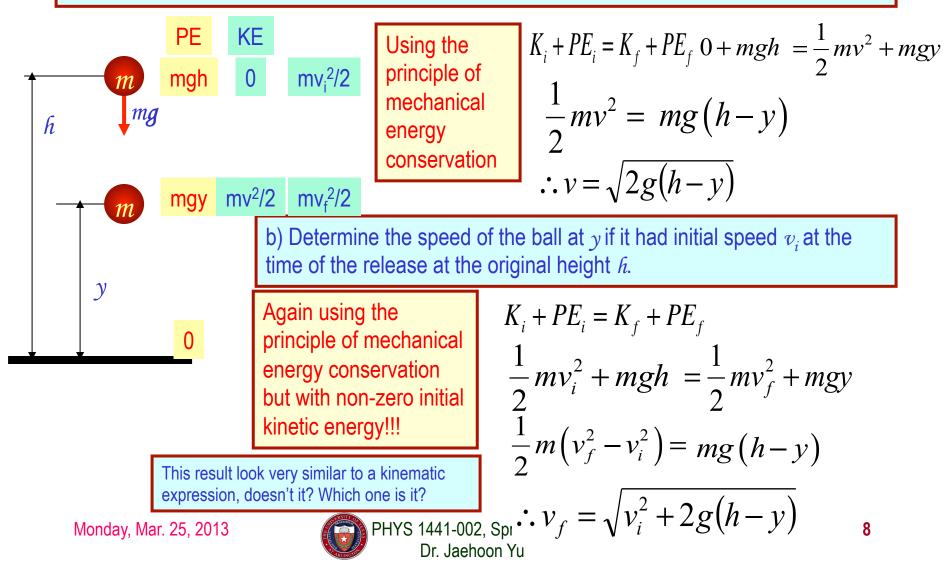

## Power

- Rate at which the work is done or the energy is transferred
  - What is the difference for the same car with two different engines (4 cylinder and 8 cylinder) climbing the same hill?
  - $\rightarrow$  The time... 8 cylinder car climbs up the hill faster!

Is the total amount of work done by the engines different? NO Then what is different? The rate at which the same amount of work performed is higher for 8 cylinders than 4.

Average power

$$\frac{\Delta W}{\Delta t} = \frac{Fs}{\Delta t} = F\frac{s}{\Delta t} = F\overline{v}$$

Scalar quantity


Energy

Unit? J/s = Watts

 $\overline{P} \equiv$ 

 $1HP \equiv 746Watts$ 

What do power companies sell?  $1kWH = 1000Watts \times 3600s = 3.6 \times 10^6 J$ 



### Energy Loss in Automobile

Automobile uses only 13% of its fuel to propel the vehicle.



- Incomplete burning
- Heat
- Sound

16% in friction in mechanical parts

4% in operating other crucial parts such as oil and fuel pumps, etc

13% used for balancing energy loss related to moving the vehicle, like air resistance and road friction to tire, etc

Two frictional forces involved in moving vehicles $m_{car} = 1450 kg$ Weight = mg = 14200NCoefficient of Rolling Friction;  $\mu = 0.016$  $\mu n = \mu mg = 227N$ Air Drag $f_a = \frac{1}{2} D\rho Av^2 = \frac{1}{2} \times 0.5 \times 1.293 \times 2v^2 = 0.647v^2$ Total Resistance $f_t = f_r + f_a$ Total power to keep speed v=26.8m/s=60mi/h $P = f_t v = (691N) \cdot 26.8 = 18.5kW$ Power to overcome each component of resistance $P_r = f_r v = (227) \cdot 26.8 = 6.08kW$ Monday, Mar. 25, 2013PHYS 1441-002, Spi  $P_a = f_a v = (464.7) \cdot 26.8 = 12.5kW$ 

## Human Metabolic Rates

Activity	Rate (watts)
Running (15 km/h)	1340 W
Skiing	1050 W
Biking	530 W
Walking (5 km/h)	280 W
Sleeping	77 W

<sup>a</sup>For a young 70-kg male.



### Ex. The Power to Accelerate a Car

A 1.10x10<sup>3</sup>kg car, starting from rest, accelerates for 5.00s. The magnitude of the acceleration is a=4.60m/s<sup>2</sup>. Determine the average power generated by the net force that accelerates the vehicle.

What is the force that  $F = ma = (1.10 \times 10^3) \cdot (4.60 \, m/s^2) = 5060 N$ accelerates the car?  $\overline{v} = \frac{v_0 + v_f}{2} = \frac{0 + v_f}{2} = \frac{v_f}{2}$ Since the acceleration is constant, we obtain From the kinematic  $v_f = v_0 + at = 0 + (4.60 \, m/s^2) \cdot (5.00s) = 23.0 \, m/s$ formula Thus, the average  $\frac{v_f}{2} = \frac{23.0}{2} = 11.5 \, m/s$ speed is And, the  $\overline{P} = F\overline{v} = (5060N) \cdot (11.5 m/s) = 5.82 \times 10^4 W$ average power is = 78.0 hpPHYS 1441-002, Spring 2013 Monday, Mar. 25, 2013 12 Dr. Jaehoon Yu