

PHYS 1443 – Section 001

Lecture #17

Thursday, July 7, 2011

*Dr. **Jaehoon** **Yu***

- Equilibrium Problems
- Elastic Property of Solids
- Fluid and Pressure
- Pascal's Principle
- Absolute and Relative Pressure
- Flow Rate and Equation of Continuity



Announcements

- Final Comprehensive Exam
 - 8 – 10am, Monday, July 11 in SH103
 - Covers CH1.1 through what we finish today (CH13.6) plus Appendices A and B
 - Mixture of multiple choice and free response problems
 - Please do not miss the exam!!
- Please bring your planetarium special credit sheet during the intermission



More on Conditions for Equilibrium

To simplify the problem, we will only deal with forces acting on x-y plane, giving torque only along z-axis. What do you think the conditions for equilibrium are in this case?


The six possible equations from the two vector equations turns to three equations.

$$\sum \vec{F} = 0 \Rightarrow \begin{cases} \sum F_x = 0 \\ \sum F_y = 0 \end{cases}$$

AND

$$\sum \vec{\tau} = 0 \Rightarrow \sum \tau_z = 0$$

What happens if there are many forces exerting on an object?

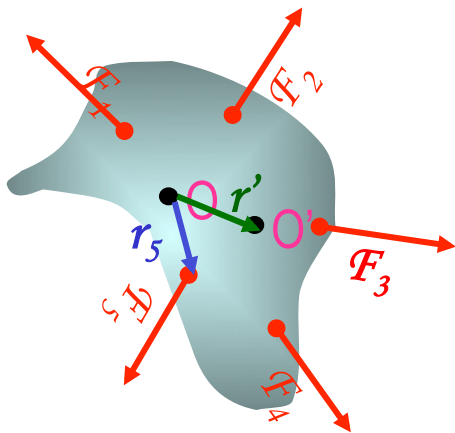

If an object is at its translational static equilibrium, and if the net torque acting on the object is 0 about one axis, the net torque must be 0 about any arbitrary axis.

Why is this true?

Because the object is not moving in the first place, no matter where the rotational axis is, there should not be any motion. This simply is a matter of mathematical manipulation.




How do we solve equilibrium problems?

1. Identify all the forces and their directions and locations
2. Draw a free-body diagram with forces indicated on it with their directions and locations properly noted
3. Write down the force equation for each x and y component with proper signs
4. Select a rotational axis for torque calculations → Selecting the axis such that the torque of one of the unknown forces become 0 makes the problem easier to solve
5. Write down the torque equation with proper signs
6. Solve the equations for unknown quantities



Example 12 – 6

A 5.0 m long ladder leans against a wall at a point 4.0m above the ground. The ladder is uniform and has mass 12.0kg. Assuming the wall is frictionless (but ground is not), determine the forces exerted on the ladder by the ground and the wall.

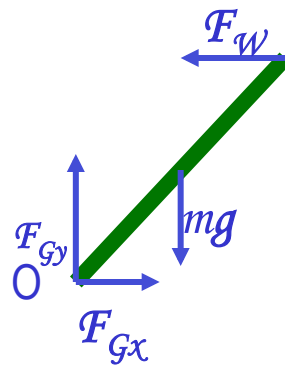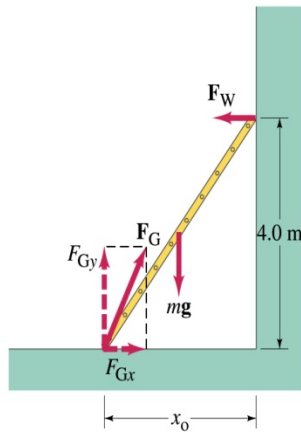

First the translational equilibrium, using components

$$\sum F_x = F_{Gx} - F_W = 0$$

$$\sum F_y = -mg + F_{Gy} = 0$$

Thus, the y component of the force by the ground is

$$F_{Gy} = mg = 12.0 \times 9.8 N = 118 N$$

The length x_0 is, from Pythagorean theorem

$$x_0 = \sqrt{5.0^2 - 4.0^2} = 3.0 m$$

Example 12 – 6 cont'd

From the rotational equilibrium $\sum \tau_O = -mg x_0/2 + F_W 4.0 = 0$

Thus the force exerted on the ladder by the wall is

$$F_W = \frac{mg x_0/2}{4.0} = \frac{118 \cdot 1.5}{4.0} = 44 N$$

The x component of the force by the ground is

$$\sum F_x = F_{Gx} - F_W = 0 \quad \text{Solve for } F_{Gx} \quad F_{Gx} = F_W = 44 N$$

Thus the force exerted on the ladder by the ground is

$$F_G = \sqrt{F_{Gx}^2 + F_{Gy}^2} = \sqrt{44^2 + 118^2} \approx 130 N$$

The angle between the ground force to the floor

$$\theta = \tan^{-1} \left(\frac{F_{Gy}}{F_{Gx}} \right) = \tan^{-1} \left(\frac{118}{44} \right) = 70^\circ$$

Elastic Properties of Solids

We have been assuming that the objects do not change their shapes when external forces are exerting on it. Is this realistic?

No. In reality, objects get deformed as external forces act on it, though the internal forces resist the deformation as it takes place.

Deformation of solids can be understood in terms of Stress and Strain

Stress: The amount of the deformation force per unit area the object is under

Strain: The measure of the degree of deformation

It is empirically known that for small stresses, strain is proportional to stress

The constants of proportionality are called Elastic Modulus $\text{Elastic Modulus} \equiv \frac{\text{stress}}{\text{strain}}$


Three types of
Elastic Modulus

1. **Young's modulus:** Measure of the elasticity in a length
2. **Shear modulus:** Measure of the elasticity in an area
3. **Bulk modulus:** Measure of the elasticity in a volume




Elastic Limit and Ultimate Strength

- Elastic limit: The limit of elasticity beyond which an object cannot recover its original shape or the maximum stress that can be applied to the substance before it becomes permanently deformed
- Ultimate strength: The maximum force that can be applied on the object before breaking it

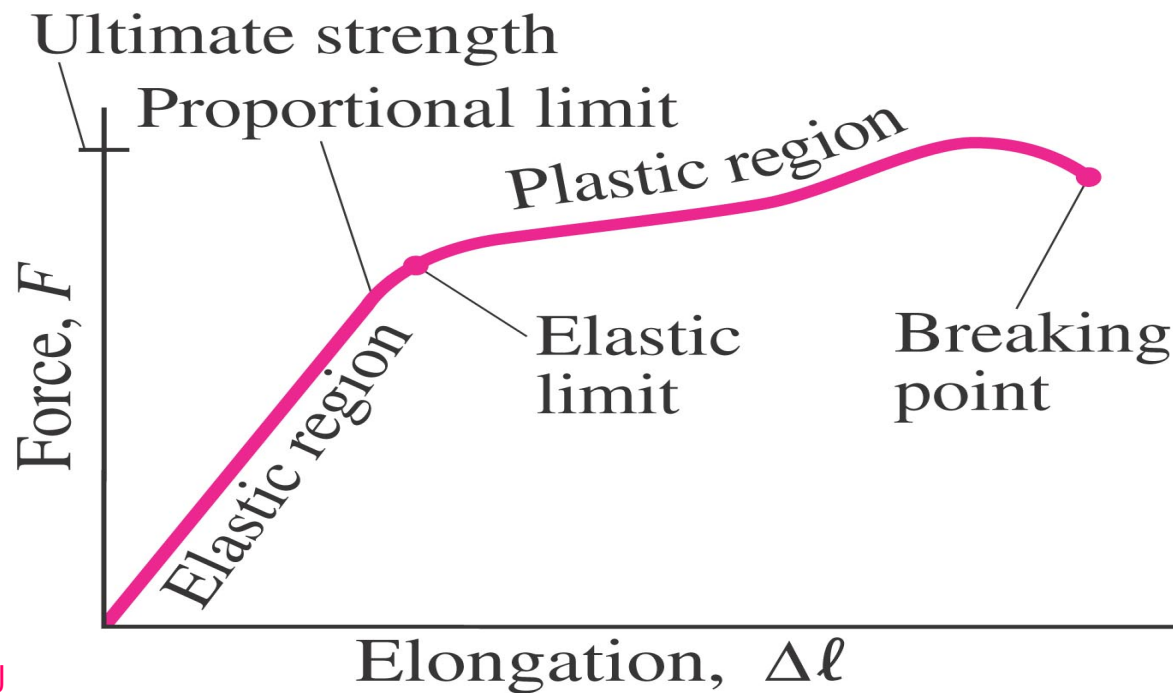

Young's Modulus

Let's consider a long bar with cross sectional area A and initial length \mathcal{L}_i .

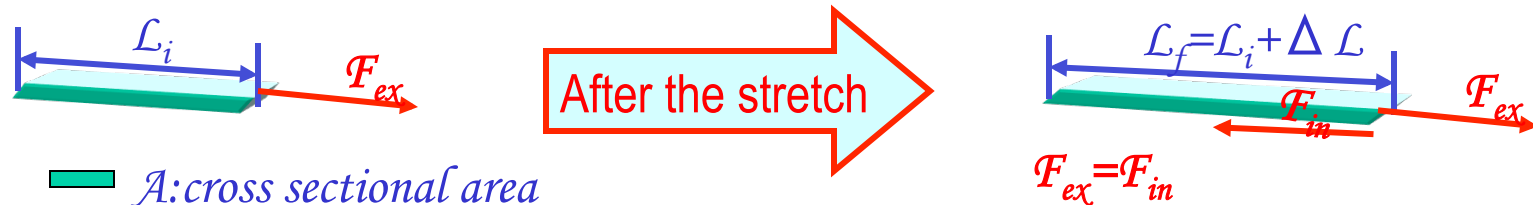

Tensile stress

$$\text{Tensile Stress} \equiv \frac{F_{ex}}{A}$$

Tensile strain

$$\text{Tensile Strain} \equiv \frac{\Delta L}{L_i}$$

Young's Modulus is defined as

$$Y \equiv \frac{\text{Tensile Stress}}{\text{Tensile Strain}} = \frac{F_{ex}/A}{\Delta L/L_i}$$

Used to characterize a rod or wire stressed under tension or compression

What is the unit of Young's Modulus?


Force per unit area

Experimental Observations

1. For a fixed external force, the change in length is proportional to the original length
2. The necessary force to produce the given strain is proportional to the cross sectional area

Bulk Modulus

Bulk Modulus characterizes the response of a substance to uniform squeezing or reduction of pressure.

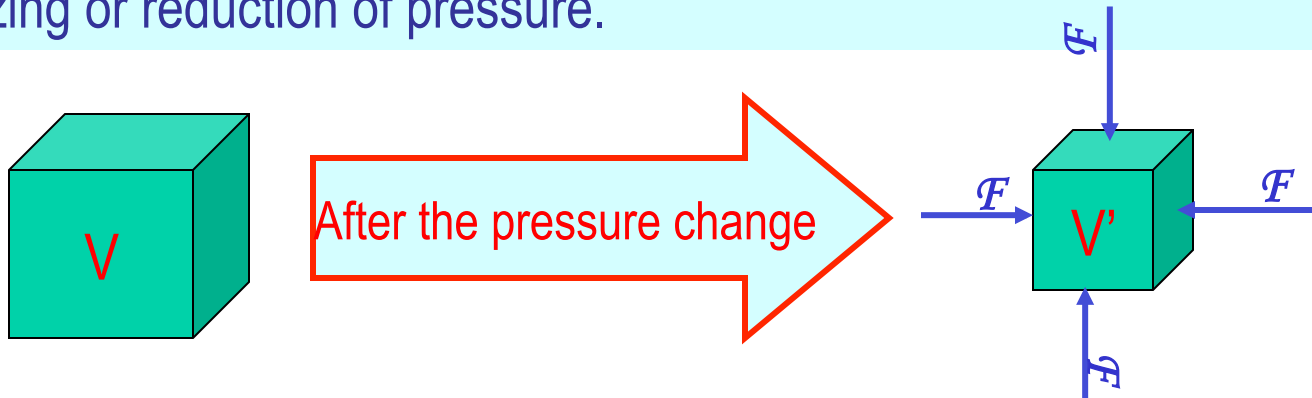

Volume stress
= pressure

$$\text{Pressure} \equiv \frac{\text{Normal Force}}{\text{Surface Area the force applies}} = \frac{F}{A}$$

If the pressure on an object changes by $\Delta P = \Delta F/A$, the object will undergo a volume change ΔV .

Bulk Modulus is
defined as

$$B \equiv \frac{\text{Volume Stress}}{\text{Volume Strain}} = - \frac{\Delta F / A}{\Delta V / V_i} = - \frac{\Delta P}{\Delta V / V_i}$$

Because the change of volume is
reverse to change of pressure.

Compressibility is the reciprocal of Bulk Modulus

Elastic Moduli and Ultimate Strengths of Materials

TABLE 12-1 Elastic Moduli

Material	Young's Modulus, E (N/m ²)	Shear Modulus, G (N/m ²)	Bulk Modulus, B (N/m ²)
<i>Solids</i>			
Iron, cast	100×10^9	40×10^9	90×10^9
Steel	200×10^9	80×10^9	140×10^9
Brass	100×10^9	35×10^9	80×10^9
Aluminum	70×10^9	25×10^9	70×10^9
Concrete	20×10^9		
Brick	14×10^9		
Marble	50×10^9		70×10^9
Granite	45×10^9		45×10^9
Wood (pine) (parallel to grain)	10×10^9		
(perpendicular to grain)	1×10^9		
Nylon	5×10^9		
Bone (limb)	15×10^9	80×10^9	
<i>Liquids</i>			
Water			2.0×10^9
Alcohol (ethyl)			1.0×10^9
Mercury			2.5×10^9
<i>Gases</i> [†]			
Air, H ₂ , He, CO ₂			1.01×10^5

[†] At normal atmospheric pressure; no variation in temperature during process.

TABLE 12-2 Ultimate Strengths of Materials (force/area)

Material	Tensile Strength (N/m ²)	Compressive Strength (N/m ²)	Shear Strength (N/m ²)
Iron, cast	170×10^6	550×10^6	170×10^6
Steel	500×10^6	500×10^6	250×10^6
Brass	250×10^6	250×10^6	200×10^6
Aluminum	200×10^6	200×10^6	200×10^6
Concrete	2×10^6	20×10^6	2×10^6
Brick		35×10^6	
Marble		80×10^6	
Granite		170×10^6	
Wood (pine) (parallel to grain)	40×10^6	35×10^6	5×10^6
(perpendicular to grain)		10×10^6	
Nylon	500×10^6		
Bone (limb)	130×10^6	170×10^6	

Copyright © 2008 Pearson Education, Inc.

Example for Solid's Elastic Property

A solid brass sphere is initially under normal atmospheric pressure of $1.0 \times 10^5 \text{ N/m}^2$. The sphere is lowered into the ocean to a depth at which the pressure is $2.0 \times 10^7 \text{ N/m}^2$. The volume of the sphere in air is 0.5 m^3 . By how much its volume change once the sphere is submerged?

Since bulk modulus is $B = -\frac{\Delta P}{\Delta V / V_i}$

The amount of volume change is $\Delta V = -\frac{\Delta P V_i}{B}$

From table 12.1, bulk modulus of brass is $8.0 \times 10^{10} \text{ N/m}^2$

The pressure change ΔP is $\Delta P = P_f - P_i = 2.0 \times 10^7 - 1.0 \times 10^5 \approx 2.0 \times 10^7$

Therefore the resulting volume change ΔV is $\Delta V = V_f - V_i = -\frac{2.0 \times 10^7 \times 0.5}{8.0 \times 10^{10}} = -1.2 \times 10^{-4} \text{ m}^3$

The volume has decreased.



Density and Specific Gravity

Density, ρ (rho), of an object is defined as mass per unit volume

$$\rho \equiv \frac{M}{V}$$

Unit?	kg / m^3
Dimension?	$[ML^{-3}]$

Specific Gravity of a substance is defined as the ratio of the density of the substance to that of water at 4.0 °C ($\rho_{H_2O}=1.00g/cm^3$).

$$SG \equiv \frac{\rho_{\text{substance}}}{\rho_{H_2O}}$$

Unit?	None
Dimension?	None

What do you think would happen to the substance in the water dependent on SG?

$SG > 1$	Sink in the water
$SG < 1$	Float on the surface



Fluid and Pressure

What are the three states of matter?

Solid, Liquid and Gas

How do you distinguish them?

Using the time it takes for a particular substance to change its shape in reaction to external forces.

What is a fluid?


A collection of molecules that are randomly arranged and loosely bound by forces between them or by an external container.

We will first learn about mechanics of fluid at rest, *fluid statics*.

In what ways do you think fluid exerts stress on the object submerged in it?

Fluid cannot exert shearing or tensile stress. Thus, the only force the fluid exerts on an object immersed in it is the force perpendicular to the surface of the object. This force by the fluid on an object usually is expressed in the form of the force per unit area at the given depth, the pressure, defined as

$$P \equiv \frac{F}{A}$$



Expression of pressure for an infinitesimal area dA by the force dF is

$$P = \frac{dF}{dA}$$

Note that pressure is a scalar quantity because it's the magnitude of the force on a surface area A .

What is the unit and the dimension of pressure?

Unit: N/m^2

Dim.: $[M][L^{-1}][T^{-2}]$

Special SI unit for pressure is Pascal

$$1Pa \equiv 1N / m^2$$

Thursday, July 7, 2011



PHYS 1443-001, Summer 2011 Dr.
Jaehoon Yu

14

Example for Pressure

The mattress of a water bed is 2.00m long by 2.00m wide and 30.0cm deep. a) Find the weight of the water in the mattress.

The volume density of water at the normal condition (4°C and 1 atm) is 1000kg/m³. So the total mass of the water in the mattress is

$$m = \rho_w V_M = 1000 \times 2.00 \times 2.00 \times 0.300 = 1.20 \times 10^3 \text{ kg}$$

Therefore the weight of the water in the mattress is

$$W = mg = 1.20 \times 10^3 \times 9.8 = 1.18 \times 10^4 \text{ N}$$

b) Find the pressure exerted by the water on the floor when the bed rests in its normal position, assuming the entire lower surface of the mattress makes contact with the floor.


Since the surface area of the mattress is 4.00 m², the pressure exerted on the floor is

$$P = \frac{F}{A} = \frac{mg}{A} = \frac{1.18 \times 10^4}{4.00} = 2.95 \times 10^3 \text{ N / m}^2$$



Variation of Pressure and Depth

Water pressure increases as a function of depth, and the air pressure decreases as a function of altitude. Why?

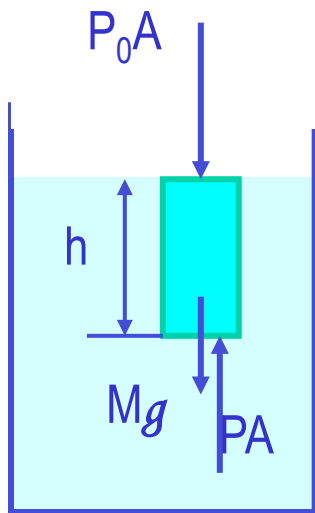

It seems that the pressure has a lot to do with the total mass of the fluid above the object that puts weight on the object.

Let's imagine the liquid contained in a cylinder with height h and the cross sectional area A immersed in a fluid of density ρ at rest, as shown in the figure, and the system is in its equilibrium.

If the liquid in the cylinder is the same substance as the fluid, the mass of the liquid in the cylinder is $M = \rho V = \rho Ah$

Since the system is in its equilibrium $PA - P_0 A - Mg = PA - P_0 A - \rho Ahg = 0$

Therefore, we obtain $P = P_0 + \rho gh$

Atmospheric pressure P_0 is

$$1.00 \text{ atm} = 1.013 \times 10^5 \text{ Pa}$$

The pressure at the depth h below the surface of the fluid open to the atmosphere is greater than the atmospheric pressure by ρgh .

Pascal's Principle and Hydraulics


A change in the pressure applied to a fluid is transmitted undiminished to every point of the fluid and to the walls of the container.

$$P = P_0 + \rho gh$$

What happens if P_0 is changed?

The resultant pressure P at any given depth h increases as much as the change in P_0 .

This is the principle behind hydraulic devices. How?

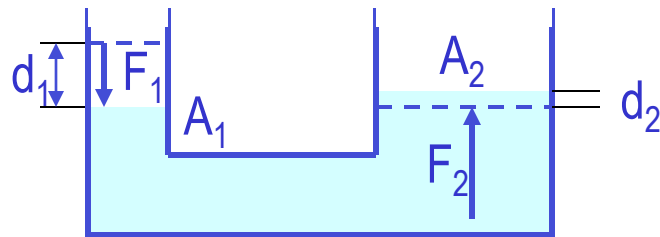

Since the pressure change caused by the force F_1 applied onto the area A_1 is transmitted to the F_2 on an area A_2 .

$$P = \frac{F_1}{A_1} = \frac{F_2}{A_2}$$

Therefore, the resultant force F_2 is $F_2 = \frac{A_2}{A_1} F_1$ In other words, the force gets multiplied by the ratio of the areas A_2/A_1 and is transmitted to the force F_2 on the surface.

This seems to violate some kind of conservation law, doesn't it?

No, the actual displaced volume of the fluid is the same. And the work done by the forces are still the same.

$$F_2 = \frac{d_1}{d_2} F_1$$

Example for Pascal's Principle

In a car lift used in a service station, compressed air exerts a force on a small piston that has a circular cross section and a radius of 5.00cm. This pressure is transmitted by a liquid to a piston that has a radius of 15.0cm. What force must the compressed air exert to lift a car weighing 13,300N? What air pressure produces this force?

Using the Pascal's principle, one can deduce the relationship between the forces, the force exerted by the compressed air is

$$F_1 = \frac{A_1}{A_2} F_2 = \frac{\pi (0.05)^2}{\pi (0.15)^2} \times 1.33 \times 10^4 = 1.48 \times 10^3 \text{ N}$$


Therefore the necessary pressure of the compressed air is

$$P = \frac{F_1}{A_1} = \frac{1.48 \times 10^3}{\pi (0.05)^2} = 1.88 \times 10^5 \text{ Pa}$$



Absolute and Relative Pressure

How can one measure pressure?

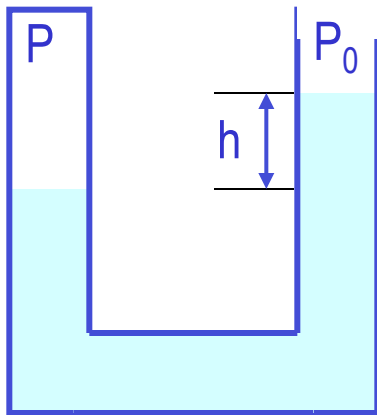

One can measure the pressure using an open-tube manometer, where one end is connected to the system with unknown pressure P and the other open to air with pressure P_0 .

The measured pressure of the system is $P = P_0 + \rho gh$

This is called the absolute pressure, because it is the actual value of the system's pressure.

In many cases we measure the pressure difference with respect to the atmospheric pressure to avoid the effect of the changes in P_0 that depends on the environment. This is called gauge or relative pressure.

$$P_G = P - P_0 = \rho gh$$

The common barometer which consists of a mercury column with one end closed at vacuum and the other open to the atmosphere was invented by Evangelista Torricelli.

Since the closed end is at vacuum, it does not exert any force. 1 atm of air pressure pushes mercury up 76cm. So 1 atm is

$$\begin{aligned} P_0 &= \rho gh = (13.595 \times 10^3 \text{ kg/m}^3)(9.80665 \text{ m/s}^2)(0.7600 \text{ m}) \\ &= 1.013 \times 10^5 \text{ Pa} = 1 \text{ atm} \end{aligned}$$

If one measures the tire pressure with a gauge at 220kPa the actual pressure is 101kPa+220kPa=303kPa.