

PHYS 1441 – Section 001

Lecture #16

Wednesday, July 2, 2014

*Dr. **Jaehoon** **Yu***

- Rolling Motion of a Rigid Body
- Torque
- Moment of Inertia
- Angular Momentum
- Equilibrium
- Fluid and Pressure



Announcements

- Final exam

- 10:30am – 12:30pm, Monday, July 7
- Comprehensive exam, covers from CH1.1 – CH9.7 plus appendices A1 – A8
- Bring your calculator but DO NOT input formula into it!
 - Your phones or portable computers are NOT allowed as a replacement!
- You can prepare a one 8.5x11.5 sheet (front and back) of handwritten formulae and values of constants for the exam
 - None of the part of the solutions of any problems
 - no derived formulae, derivations of equations or word definitions!
 - No additional formulae or values of constants will be provided!

- Quiz 4 results

- Class average: 20.4/40
 - Equivalent to 51/100
 - Previous quizzes: 69.3/100, 59.6/100 and 61.8/100
- Top score: 40/40

Wednesday, July 2, 2014



PHYS 1441-001, Summer 2014
Dr. Jaehoon Yu

Reminder: Extra-Credit Special Project #5

- Derive express the final velocities of the two objects which underwent an elastic collision as a function of known quantities m_1 , m_2 , v_{01} and v_{02} in a far greater detail than in the lecture note. (20 points)
- Show mathematically what happens to the final velocities if $m_1=m_2$ and describe in words the resulting motion. (5 points)
- Due: Monday, July 7, 2014



Rolling Motion of a Rigid Body

What is a rolling motion?

A more generalized case of a motion where the rotational axis moves together with an object

A rotational motion about a moving axis


To simplify the discussion, let's make a few assumptions

1. Limit our discussion on very symmetric objects, such as cylinders, spheres, etc
2. The object rolls on a flat surface

Let's consider a cylinder rolling on a flat surface, without slipping.

Under what condition does this “Pure Rolling” happen?

The total linear distance the CM of the cylinder moved is $s = R\theta$

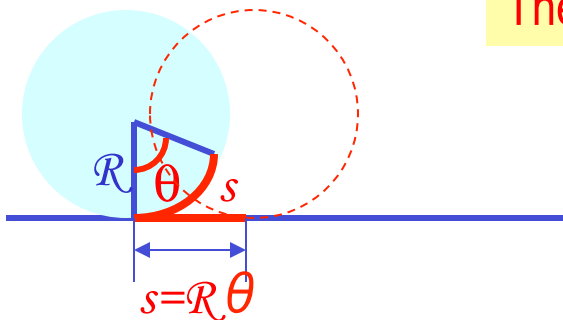

Thus the linear speed of the CM is

$$\bar{v}_{CM} = \frac{\Delta s}{\Delta t} = R \frac{\Delta \theta}{\Delta t} = R\omega$$

The condition for a “Pure Rolling motion”


Ex. An Accelerating Car

Starting from rest, the car accelerates for 20.0 s with a constant linear acceleration of 0.800 m/s². The radius of the tires is 0.330 m. What is the angle through which each wheel has rotated?


$$\alpha = \frac{a}{r} = \frac{0.800 \text{ m/s}^2}{0.330 \text{ m}} = 2.42 \text{ rad/s}^2$$

θ	α	ω	ω_o	t
?	-2.42 rad/s ²		0 rad/s	20.0 s

$$\begin{aligned}\theta &= \omega_o t + \frac{1}{2} \alpha t^2 \\ &= \frac{1}{2} (-2.42 \text{ rad/s}^2)^2 (20.0 \text{ s})^2 \\ &= -484 \text{ rad}\end{aligned}$$

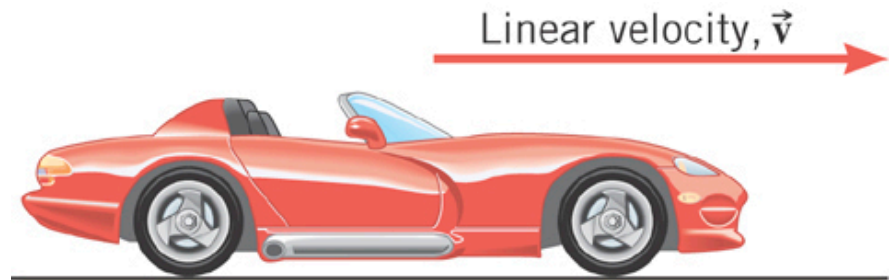


(a)

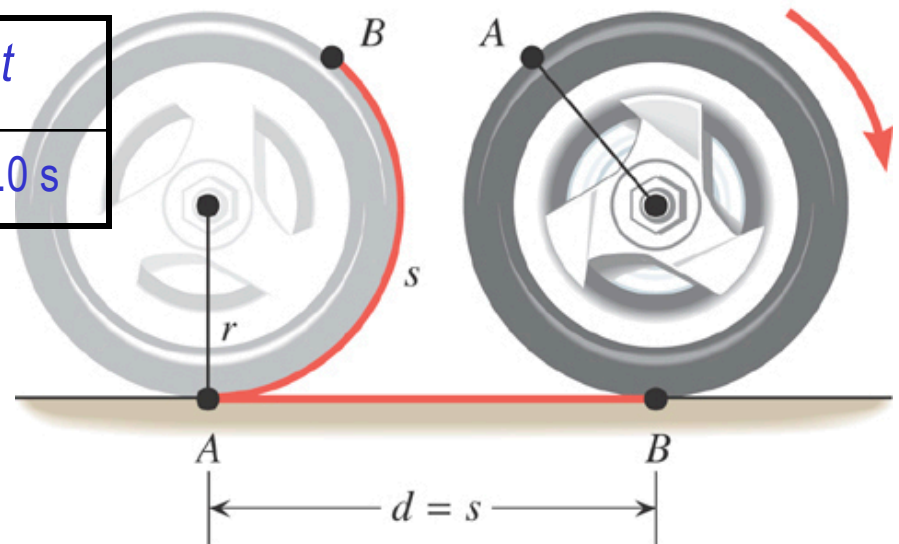

(b)

Torque

Torque is the tendency of a force to rotate an object about an axis.
Torque, τ , is a vector quantity.

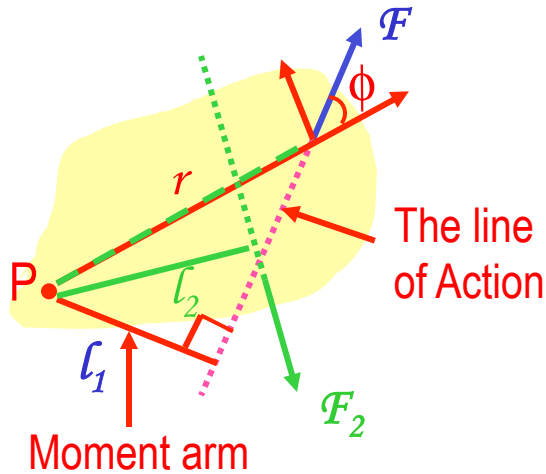

Consider an object pivoting about the point **P** by the force **F** being exerted at a distance **r** from **P**.

The line that extends out of the tail of the force vector is called the **line of action**.

The perpendicular distance from the pivoting point **P** to the **line of action** is called **the moment arm**.

Magnitude of torque is defined as the product of the force exerted on the object to rotate it and the moment arm.


When there are more than one force being exerted on certain points of the object, one can sum up the torque generated by each force vectorially. The convention for sign of the torque is **positive** if rotation is in counter-clockwise and **negative** if clockwise.

$$\begin{aligned}
 |\vec{\tau}| &\equiv (\text{Magnitude of the Force}) \\
 &\quad \times (\text{Lever Arm}) \\
 &= (F)(r \sin \phi) = Fl \\
 \sum \tau &= \tau_1 + \tau_2 \\
 &= F_1 l_1 - F_2 l_2
 \end{aligned}$$

Unit? $N \cdot m$

Example for Torque

A one piece cylinder is shaped as in the figure with core section protruding from the larger drum. The cylinder is free to rotate around the central axis shown in the picture. A rope wrapped around the drum whose radius is R_1 exerts force F_1 to the right on the cylinder, and another force exerts F_2 on the core whose radius is R_2 downward on the cylinder. A) What is the net torque acting on the cylinder about the rotation axis?

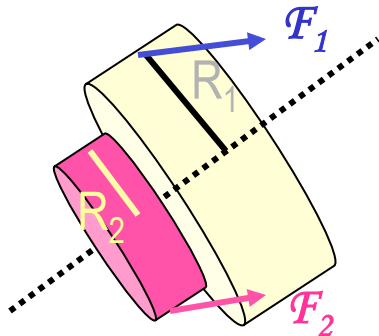

The torque due to F_1 $\tau_1 = -R_1 F_1$ and due to F_2 $\tau_2 = R_2 F_2$

So the total torque acting on the system by the forces is

$$\sum \tau = \tau_1 + \tau_2 = -R_1 F_1 + R_2 F_2$$

Suppose $F_1 = 5.0 \text{ N}$, $R_1 = 1.0 \text{ m}$, $F_2 = 15.0 \text{ N}$, and $R_2 = 0.50 \text{ m}$. What is the net torque about the rotation axis and which way does the cylinder rotate from the rest?

Using the
above result

$$\begin{aligned} \sum \tau &= -R_1 F_1 + R_2 F_2 \\ &= -5.0 \times 1.0 + 15.0 \times 0.50 = 2.5 \text{ N} \cdot \text{m} \end{aligned}$$

The cylinder rotates in
counter-clockwise.

Moment of Inertia

Rotational Inertia:

Measure of resistance of an object to changes in its rotational motion.
Equivalent to mass in linear motion.

For a group
of objects

$$I \equiv \sum_i m_i r_i^2$$

For a rigid
body

$$I \equiv \int r^2 dm$$

What are the dimension and
unit of Moment of Inertia?

$$[ML^2] \quad kg \cdot m^2$$

Determining Moment of Inertia is extremely important for computing equilibrium of a rigid body, such as a building.

Dependent on the axis of rotation!!!

Ex. The Moment of Inertia Depends on Where the Axis Is.

Two particles each have mass m_1 and m_2 and are fixed at the ends of a thin rigid rod. The length of the rod is L . Find the moment of inertia when this object rotates relative to an axis that is perpendicular to the rod at (a) one end and (b) the center.

$$(a) \quad I = \sum (mr^2) = m_1 r_1^2 + m_2 r_2^2$$


$$m_1 = m_2 = m \quad r_1 = 0 \quad r_2 = L$$

$$I = m(0)^2 + m(L)^2 = mL^2$$

$$(b) \quad I = \sum (mr^2) = m_1 r_1^2 + m_2 r_2^2$$

$$m_1 = m_2 = m \quad r_1 = L/2 \quad r_2 = L/2$$

$$I = m(L/2)^2 + m(L/2)^2 = \frac{1}{2} mL^2$$

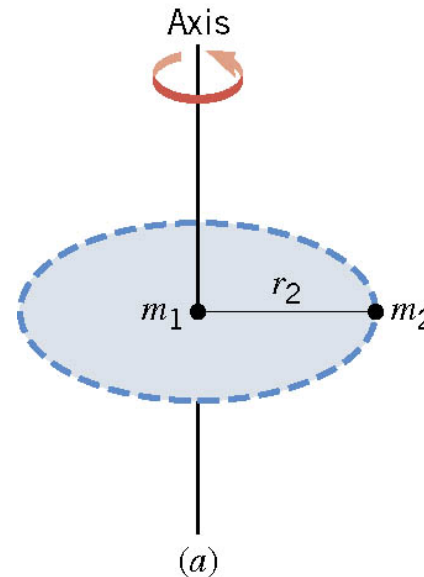


Which case is easier to spin?

Case (b)

Why? Because the moment of inertia is smaller

Example for Moment of Inertia

In a system of four small spheres as shown in the figure, assuming the radii are negligible and the rods connecting the particles are massless, compute the moment of inertia and the rotational kinetic energy when the system rotates about the y-axis at angular speed ω .

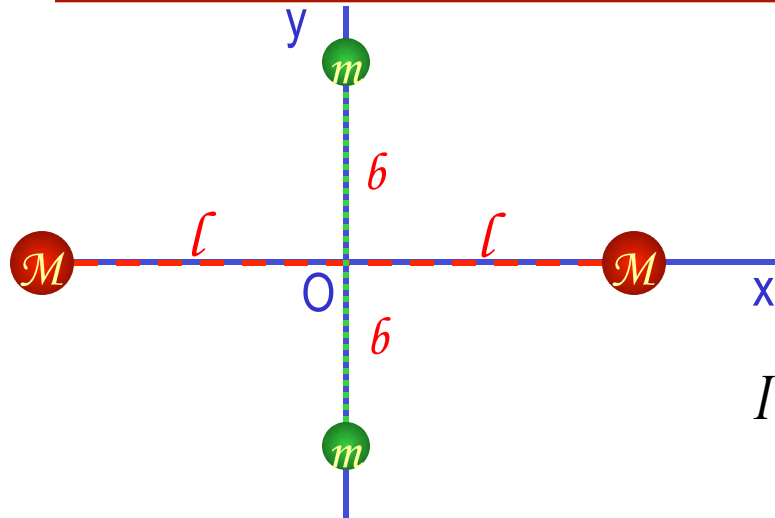

Since the rotation is about y axis, the moment of inertia about y axis, I_y , is










$$I = \sum_i m_i r_i^2 = Ml^2 + Ml^2 + m \cdot 0^2 + m \cdot 0^2 = 2Ml^2$$

Why are some 0s?


This is because the rotation is done about the y axis, and the radii of the spheres are negligible.

Check out Figure 8 – 21 for moment of inertia for various shaped objects

Table 9.1 Moments of Inertia I for Various Rigid Objects of Mass M

Thin-walled hollow cylinder or hoop		$I = MR^2$
Solid cylinder or disk		$I = \frac{1}{2}MR^2$
Thin rod, axis perpendicular to rod and passing through center		$I = \frac{1}{12}ML^2$
Thin rod, axis perpendicular to rod and passing through one end		$I = \frac{1}{3}ML^2$
Solid sphere, axis through center		$I = \frac{2}{5}MR^2$
Solid sphere, axis tangent to surface		$I = \frac{7}{5}MR^2$
Thin-walled spherical shell, axis through center		$I = \frac{2}{3}MR^2$
Thin rectangular sheet, axis parallel to one edge and passing through center of other edge		$I = \frac{1}{12}ML^2$
Thin rectangular sheet, axis along one edge		$I = \frac{1}{3}ML^2$

Rotational Kinetic Energy

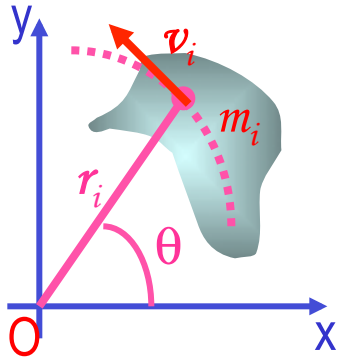

What do you think the kinetic energy of a rigid object that is undergoing a circular motion is?

Kinetic energy of a masslet, m_i , moving at a tangential speed, v_i , is $K_i = \frac{1}{2} m_i v_i^2 = \frac{1}{2} m_i r_i^2 \omega^2$

Since a rigid body is a collection of masslets, the total kinetic energy of the rigid object is

$$K_R = \sum_i K_i = \frac{1}{2} \sum_i m_i r_i^2 \omega^2 = \frac{1}{2} \left(\sum_i m_i r_i^2 \right) \omega^2$$

Since moment of Inertia, I , is defined as


$$I = \sum_i m_i r_i^2$$

The above expression is simplified as

$$K_R = \frac{1}{2} I \omega^2$$

Example for Moment of Inertia

In a system of four small spheres as shown in the figure, assuming the radii are negligible and the rods connecting the particles are massless, compute the moment of inertia and the rotational kinetic energy when the system rotates about the y-axis at angular speed ω

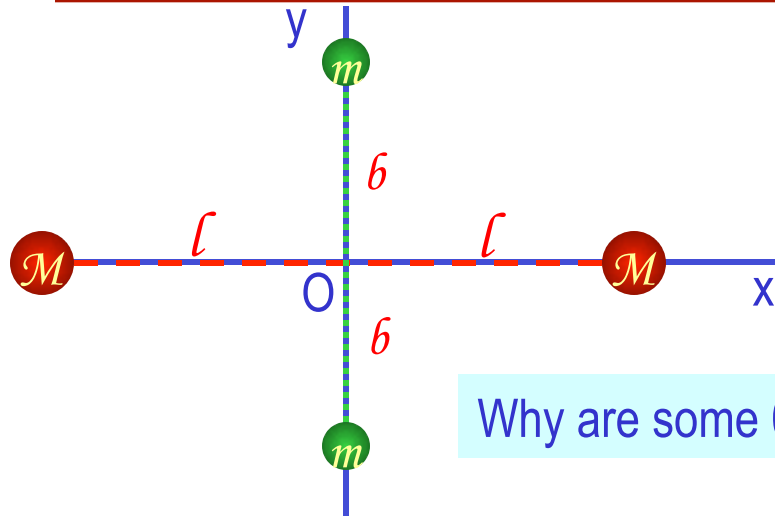

Since the rotation is about y axis, the moment of inertia about y axis, I_y , is

$$I = \sum_i m_i r_i^2 = Ml^2 + Ml^2 + m \cdot 0^2 + m \cdot 0^2 = 2Ml^2$$

Why are some 0s?

This is because the rotation is done about y axis, and the radii of the spheres are negligible.


Thus, the rotational kinetic energy is

$$K_R = \frac{1}{2} I \omega^2 = \frac{1}{2} (2Ml^2) \omega^2 = Ml^2 \omega^2$$

Find the moment of inertia and rotational kinetic energy when the system rotates on the x-y plane about the z-axis that goes through the origin O.

$$I = \sum_i m_i r_i^2 = Ml^2 + Ml^2 + mb^2 + mb^2 = 2(Ml^2 + mb^2) \quad K_R = \frac{1}{2} I \omega^2 = \frac{1}{2} (2Ml^2 + 2mb^2) \omega^2 = (Ml^2 + mb^2) \omega^2$$

Kinetic Energy of a Rolling Sphere

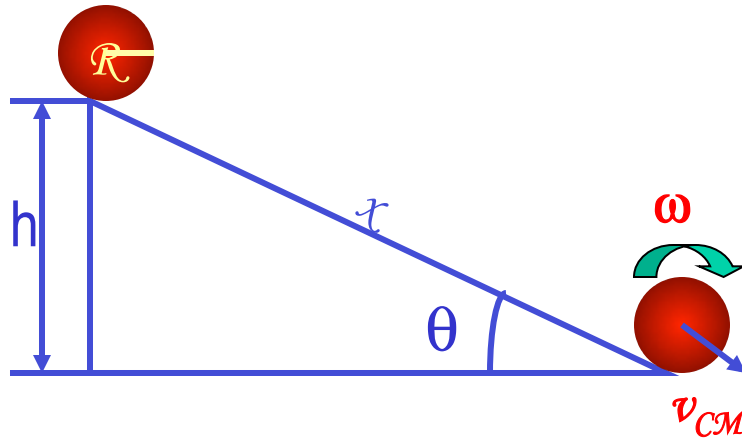

Let's consider a sphere with radius R rolling down the hill without slipping.

Since $v_{CM} = R\omega$

$$\begin{aligned} K &= \frac{1}{2} I_{CM} \omega^2 + \frac{1}{2} M R^2 \omega^2 \\ &= \frac{1}{2} I_{CM} \left(\frac{v_{CM}}{R} \right)^2 + \frac{1}{2} M v_{CM}^2 \\ &= \frac{1}{2} \left(\frac{I_{CM}}{R^2} + M \right) v_{CM}^2 \end{aligned}$$

What is the speed of the CM in terms of known quantities and how do you find this out?


Since the kinetic energy at the bottom of the hill must be equal to the potential energy at the top of the hill

$$K = \frac{1}{2} \left(\frac{I_{CM}}{R^2} + M \right) v_{CM}^2 = Mgh$$

$$v_{CM} = \sqrt{\frac{2gh}{1 + I_{CM} / MR^2}}$$

Angular Momentum of a Particle

If you grab onto a pole while running, your body will rotate about the pole, gaining angular momentum. We've used the linear momentum to solve physical problems with linear motions, the angular momentum will do the same for rotational motions.

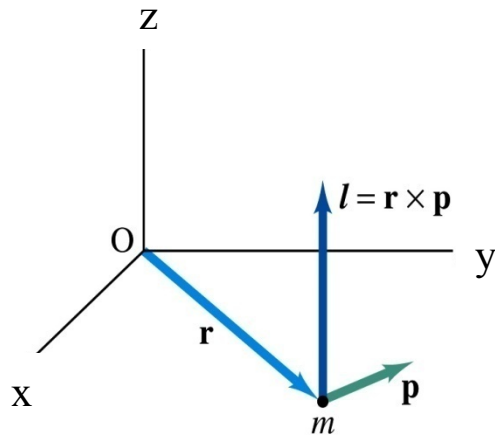

Let's consider a point-like object (particle) with mass m located at the vector location \mathbf{r} and moving with linear velocity \mathbf{v}

The angular momentum \mathcal{L} of this particle relative to the origin O is

$$\vec{L} \equiv \vec{r} \times \vec{p}$$

What is the unit and dimension of angular momentum? $\text{kg} \cdot \text{m}^2 / \text{s} \quad [ML^2T^{-1}]$

Note that \mathcal{L} depends on origin O. Why? Because \mathbf{r} changes

What else do you learn? The direction of \mathcal{L} is +z.

Since \mathbf{p} is $m\mathbf{v}$, the magnitude of \mathcal{L} becomes $L = mvr = mr^2\omega = I\omega$

What do you learn from this?

If the direction of linear velocity points to the origin of rotation, the particle does not have any angular momentum.

If the linear velocity is perpendicular to position vector, the particle moves exactly the same way as a point on a rim.

Conservation of Angular Momentum

Remember under what condition the linear momentum is conserved?

Linear momentum is conserved when the net external force is 0. $\sum \vec{F} = 0 = \frac{\Delta \vec{p}}{\Delta t}$
 $\vec{p} = \text{const}$

By the same token, the angular momentum of a system is constant in both magnitude and direction, if the resultant external torque acting on the system is 0.

$$\sum \vec{\tau}_{ext} = \frac{\Delta \vec{L}}{\Delta t} = 0$$

$$\vec{L} = \text{const}$$

What does this mean?

Angular momentum of the system before and after a certain change is the same.

$$\vec{L}_i = \vec{L}_f = \text{constant}$$

Three important conservation laws for isolated system that does not get affected by external forces

$$K_i + U_i = K_f + U_f$$

$$\vec{p}_i = \vec{p}_f$$

$$\vec{L}_i = \vec{L}_f$$

Mechanical Energy

Linear Momentum

Angular Momentum

Example for Angular Momentum Conservation

A star rotates with a period of 30 days about an axis through its center. After the star undergoes a supernova explosion, the stellar core, which had a radius of $1.0 \times 10^4 \text{ km}$, collapses into a neutron star of radius 3.0 km . Determine the period of rotation of the neutron star.

What is your guess about the answer?

The period will be significantly shorter, because its radius got smaller.

Let's make some assumptions:

1. There is no external torque acting on it
2. The shape remains spherical
3. Its mass remains constant

Using angular momentum conservation

$$L_i = L_f$$

$$I_i \omega_i = I_f \omega_f$$

The angular speed of the star with the period T is

$$\omega = \frac{2\pi}{T}$$

Thus
$$\omega_f = \frac{I_i \omega_i}{I_f} = \frac{mr_i^2}{mr_f^2} \frac{2\pi}{T_i}$$

$$T_f = \frac{2\pi}{\omega_f} = \left(\frac{r_f^2}{r_i^2} \right) T_i = \left(\frac{3.0}{1.0 \times 10^4} \right)^2 \times 30 \text{ days} = 2.7 \times 10^{-6} \text{ days} = 0.23 \text{ s}$$



Similarity Between Linear and Rotational Motions

All physical quantities in linear and rotational motions show striking similarity.

Quantities	Linear	Rotational
Mass	Mass M	Moment of Inertia $I = mr^2$
Length of motion	Distance L	Angle θ (Radian)
Speed	$v = \frac{\Delta r}{\Delta t}$	$\omega = \frac{\Delta \theta}{\Delta t}$
Acceleration	$a = \frac{\Delta v}{\Delta t}$	$\alpha = \frac{\Delta \omega}{\Delta t}$
Force	Force $\vec{F} = m\vec{a}$	Torque $\vec{\tau} = I\vec{\alpha}$
Work	Work $W = \vec{F} \cdot \vec{d}$	Work $W = \tau\theta$
Power	$P = \vec{F} \cdot \vec{v}$	$P = \tau\omega$
Momentum	$\vec{p} = m\vec{v}$	$\vec{L} = I\vec{\omega}$
Kinetic Energy	Kinetic $K = \frac{1}{2}mv^2$	Rotational $K_R = \frac{1}{2}I\omega^2$



Conditions for Equilibrium

What do you think the term “An object is at its equilibrium” means?

The object is either at rest (Static Equilibrium) or its center of mass is moving at a constant velocity (Dynamic Equilibrium).

When do you think an object is at its equilibrium?


Translational Equilibrium: Equilibrium in linear motion

$$\sum \vec{F} = 0$$

Is this it?

The above condition is sufficient for a point-like object to be at its translational equilibrium. However for an object with size this is not sufficient. One more condition is needed. What is it?

Let's consider two forces equal in magnitude but in opposite direction acting on a rigid object as shown in the figure. What do you think will happen?

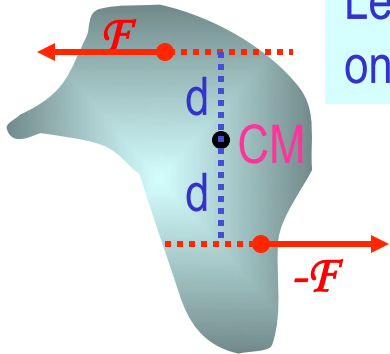

The object will rotate about the CM. Since the net torque acting on the object about a rotational axis is not 0.

$$\sum \vec{\tau} = 0$$

For an object to be at its *static equilibrium*, the object should not have linear or angular speed.

$$v_{CM} = 0 \quad \omega = 0$$

Wednesday, July 2, 2014



PHYS 1441-001, Summer 2014
Dr. Jaehoon Yu


More on Conditions for Equilibrium

To simplify the problem, we will only deal with forces acting on x-y plane, giving torque only along z-axis. What do you think the conditions for equilibrium be in this case?

The six possible equations from the two vector equations turns to three equations.

$$\sum \vec{F} = 0 \Rightarrow \begin{matrix} \sum F_x = 0 \\ \sum F_y = 0 \end{matrix} \text{ AND } \sum \vec{\tau} = 0 \Rightarrow \sum \tau_z = 0$$

What happens if there are many forces exerting on an object?

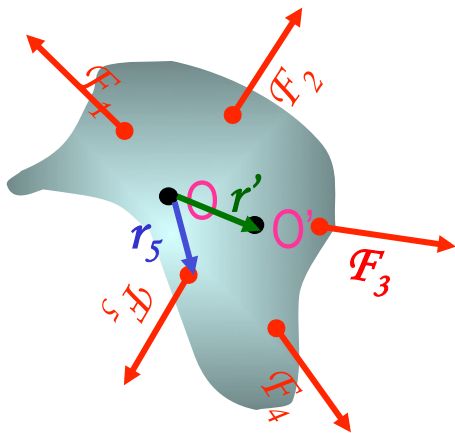

If an object is at its translational static equilibrium, and if the net torque acting on the object is 0 about one axis, the net torque must be 0 about any arbitrary axis.

Why is this true?

Because the object is not moving, no matter what the rotational axis is, there should not be any motion. It is simply a matter of mathematical manipulation.


How do we solve static equilibrium problems?

1. Select the object to which the equations for equilibrium are to be applied.
2. Identify all the forces and draw a free-body diagram with them indicated on it with their directions and locations properly indicated
3. Choose a convenient set of x and y axes and write down the force equation for each x and y component with correct signs.
4. Apply the equations that specify the balance of forces at equilibrium. Set the net force in the x and y directions equal to 0.
5. Select the most optimal rotational axis for torque calculations →
Selecting the axis such that the torque of one or more of the unknown forces become 0 makes the problem much easier to solve.
6. Write down the torque equation with proper signs.
7. Solve the force and torque equations for the desired unknown quantities.



Example for Mechanical Equilibrium

A uniform 40.0 N board supports the father and the daughter each weighing 800 N and 350 N, respectively, and is not moving. If the support (or fulcrum) is under the center of gravity of the board, and the father is 1.00 m from the center of gravity (CoG), what is the magnitude of the normal force n exerted on the board by the support?

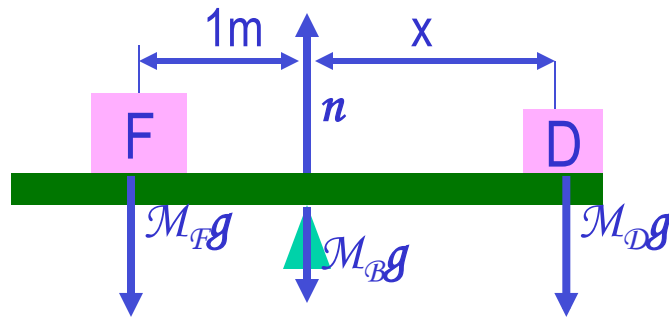

Since there is no linear motion, this system is in its translational equilibrium

$$\sum F_x = 0$$

$$\sum F_y = n - M_B g - M_F g - M_D g = 0$$

Therefore the magnitude of the normal force $n = 40.0 + 800 + 350 = 1190\text{ N}$

Determine where the child should sit to balance the system.


The net torque about the fulcrum by the three forces are

$$\tau = M_B g \cdot 0 + n \cdot 0 + M_F g \cdot 1.00 - M_D g \cdot x = 0$$

Therefore to balance the system the daughter must sit

$$x = \frac{M_F g}{M_D g} \cdot 1.00\text{ m} = \frac{800}{350} \cdot 1.00\text{ m} = 2.29\text{ m}$$

Example for Mech. Equilibrium Cont'd

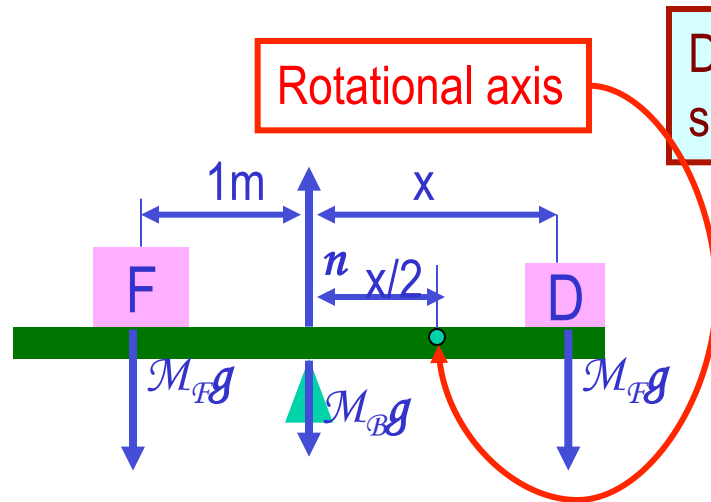

Determine the position of the child to balance the system for different position of axis of rotation.

The net torque about the axis of rotation by all the forces are

$$\tau = M_B g \cdot x/2 + M_F g \cdot (1.00 + x/2) - n \cdot x/2 - M_D g \cdot x/2 = 0$$

Since the normal force is $n = M_B g + M_F g + M_D g$

The net torque can be rewritten

$$\begin{aligned} \tau &= M_B g \cdot x/2 + M_F g \cdot (1.00 + x/2) \\ &\quad - (M_B g + M_F g + M_D g) \cdot x/2 - M_D g \cdot x/2 \\ &= M_F g \cdot 1.00 - M_D g \cdot x = 0 \end{aligned}$$

What do we learn?




Therefore

$$x = \frac{M_F g}{M_D g} \cdot 1.00\text{m} = \frac{800}{350} \cdot 1.00\text{m} = 2.29\text{m}$$

No matter where the rotation axis is, net effect of the torque is identical.

Example 9 – 7

A 5.0 m long ladder leans against a wall at a point 4.0m above the ground. The ladder is uniform and has mass 12.0kg. Assuming the wall is frictionless (but ground is not), determine the forces exerted on the ladder by the ground and the wall.

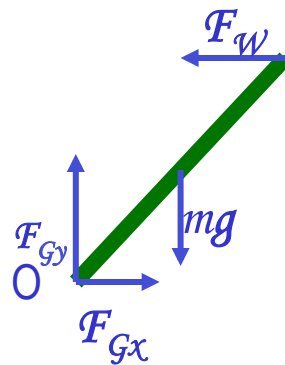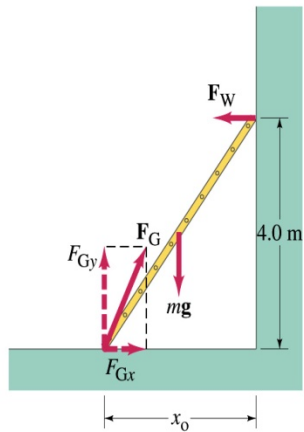

First the translational equilibrium, using components

$$\sum F_x = F_{Gx} - F_W = 0$$

$$\sum F_y = -mg + F_{Gy} = 0$$

Thus, the y component of the force by the ground is

$$F_{Gy} = mg = 12.0 \times 9.8 N = 118 N$$

The length x_0 is, from Pythagorean theorem

$$x_0 = \sqrt{5.0^2 - 4.0^2} = 3.0 m$$

Example 9 – 7 cont'd

From the rotational equilibrium $\sum \tau_o = -mg x_0/2 + F_W 4.0 = 0$

Thus the force exerted on the ladder by the wall is

$$F_W = \frac{mg x_0/2}{4.0} = \frac{118 \cdot 1.5}{4.0} = 44 N$$

The x component of the force by the ground is

$$\sum F_x = F_{Gx} - F_W = 0 \quad \text{Solve for } F_{Gx} \quad F_{Gx} = F_W = 44 N$$

Thus the force exerted on the ladder by the ground is

$$F_G = \sqrt{F_{Gx}^2 + F_{Gy}^2} = \sqrt{44^2 + 118^2} \approx 130 N$$

The angle between the ground force to the floor

$$\theta = \tan^{-1} \left(\frac{F_{Gy}}{F_{Gx}} \right) = \tan^{-1} \left(\frac{118}{44} \right) = 70^\circ$$

Density and Specific Gravity

Density, ρ (rho), of an object is defined as mass per unit volume

$$\rho \equiv \frac{M}{V}$$

Unit? kg / m^3
Dimension? $[ML^{-3}]$

Specific Gravity of a substance is defined as the ratio of the density of the substance to that of water at 4.0 °C ($\rho_{H_2O} = 1.00 g/cm^3$).

$$SG \equiv \frac{\rho_{\text{substance}}}{\rho_{H_2O}}$$

Unit? None
Dimension? None

What do you think would happen of a substance in the water dependent on SG?

$SG > 1$ Sink in the water
 $SG < 1$ Float on the surface



Fluid and Pressure

What are the three states of matter?

Solid, Liquid and Gas

How do you distinguish them?

Using the time it takes for a particular substance to change its shape in reaction to external forces.

What is a fluid?


A collection of molecules that are randomly arranged and loosely bound by forces between them or by an external container.

We will first learn about mechanics of fluid at rest, *fluid statics*.

In what ways do you think fluid exerts stress on the object submerged in it?

Fluid cannot exert shearing or tensile stress. Thus, the only force the fluid exerts on an object immersed in it is the force perpendicular to the surface of the object. This force by the fluid on an object usually is expressed in the form of the force per unit area at the given depth, the pressure, defined as

$$P \equiv \frac{F}{A}$$



Expression of pressure for an infinitesimal area dA by the force dF is

$$P = \frac{dF}{dA}$$

Note that pressure is a scalar quantity because it is the magnitude of the force per unit surface area A .

What is the unit and the dimension of pressure?

Unit: N/m^2

Dim.: $[M][L^{-1}][T^{-2}]$

Special SI unit for pressure is Pascal

$$1Pa \equiv 1N / m^2$$

Wednesday, July 2, 2014



PHYS 1441-001, Summer 2014
Dr. Jaehoon Yu

27

Example for Pressure

The mattress of a water bed is 2.00m long by 2.00m wide and 30.0cm deep. a) Find the weight of the water in the mattress.

The volume density of water at the normal condition (0°C and 1 atm) is 1000kg/m³. So the total mass of the water in the mattress is

$$m = \rho_W V_M = 1000 \times 2.00 \times 2.00 \times 0.300 = 1.20 \times 10^3 \text{ kg}$$

Therefore the weight of the water in the mattress is

$$W = mg = 1.20 \times 10^3 \times 9.8 = 1.18 \times 10^4 \text{ N}$$

b) Find the pressure exerted by the water on the floor when the bed rests in its normal position, assuming the entire lower surface of the mattress makes contact with the floor.

Since the surface area of the mattress is 4.00 m², the pressure exerted on the floor is

$$P = \frac{F}{A} = \frac{mg}{A} = \frac{1.18 \times 10^4}{4.00} = 2.95 \times 10^3$$

Congratulations!!!!

*You all are impressive and
have done very well!!!*

*I certainly had a lot of fun with ya'll
and am truly proud of you!*

Good luck with your exam!!!

Have a safe summer!!

